

# Drills & Fastening

## Tools & Accessories

**SG45M**

Drywall Screwgun



*Feel the  
Difference.  
See the Results.*

### Section Guide

#### Tools

Drywall Screwguns .....	186-188
Right Angle Drill .....	188
3/8" Drills .....	188-189
1/2" Drills .....	189-190
3/8" Tapper .....	190

#### Accessories


Wood Drilling .....	191-194
Metal Drilling .....	195-202
Hole Saws .....	203-209
Screwdriver Bits .....	210-216



**BOSCH**


# Drywall Screwguns

## Feel the Difference. See the Results.

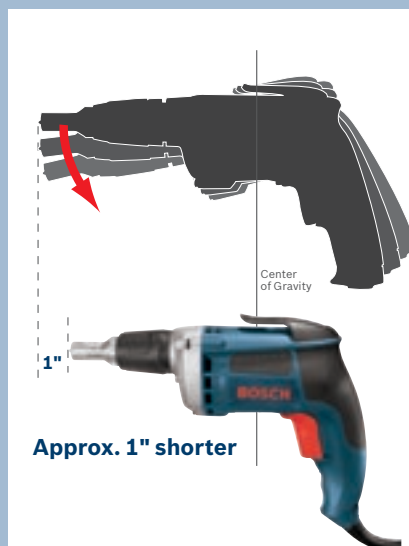

### Compact Design

Provides better tool balance and improved comfort when driving screws all day long

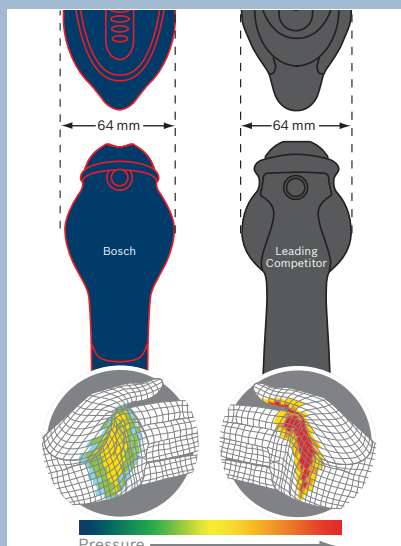

### Ergonomic Grip

Contoured grip is designed to maximize comfort and minimize fatigue with evenly distributed pressure



### Posi-Lok™ Nose Piece

Unique nose piece design is both easy to use and remove, and positively locks the depth setting when removed

## **NEW!** SG45M

Drywall Screwgun

**SG45M-50** Drywall Screwgun with 50' Twist Lock Cord (not shown)

**SG45M-50G** Drywall Screwgun with 50' 3-Prong Cord (not shown)



### Features

- 7.0 Amps, 0-4,500 RPM
- Compact Design - Increased comfort and control to drive screws all day
- Ergonomic Design - Contoured grip is designed to maximize comfort and minimize fatigue
- Posi-Lok™ Nose Piece Design (patent pending)
  - Retains depth setting when removed and eliminates time consuming depth readjustments
- 4,500 RPM - Provides the optimum speed for drywall installation and metal stud construction
- 101 in. lbs. of Torque - Best torque to weight ratio in its class
- One Hand Adjustable and Removable Nose Piece - Fast and easy adjustments whether working in a variety of materials or tight spaces
- Metal Gear Housing - For Maximum Jobsite Durability
- Unique Trigger Design - Improves user comfort for all day use
- Variable Speed Trigger with Forward-Reverse Lever - For increased control
- Belt Clip - Frees up hands for other important tasks
- Lock-On Button - For extended use applications
- Strong Bit Tip Magnet - Maximizes control when driving long screws

### Specifications

Rating	120V
Amperage	7.0
No Load RPM	0-4,500
Torque (in./lbs.)	101
Length (in.)	10.9"
Weight (lbs.)	2.95

### Includes

#### **SG45M-50**

50 Ft. Cord with Twist Lock Plug

#### **SG45M-50G**

50 Ft. Cord with 3-Prong Grounded Standard Plug



See pages 210-213, 215 for drill accessories.

# Drywall Screwguns

## Specifications

Rating	120V
Amperage	6.2
No Load RPM	0-4,500
Torque (in./lbs.)	70
Length (in.)	10.9"
Weight (lbs.)	2.6



See pages 210-213, 215 for drill accessories.

## Features

- 6.2 Amps, 0-4,500 RPM
- Compact Design - Increased comfort and control to drive screws all day
- Ergonomic Design - Contoured grip is designed to maximize comfort and minimize fatigue
- Posi-Lok™ Nose Piece Design (patent pending)
  - Retains depth setting when removed and eliminates time consuming depth readjustments
- 4,500 RPM - Provides the optimum speed for drywall installation and metal stud construction
- 70 in. lbs. of Torque - Best torque to weight ratio in its class
- One Hand Adjustable and Removable Nose Piece - Fast and easy adjustments whether working in a variety of materials or tight spaces
- Plastic Gear Housing - Provides lightweight design
- Unique Trigger Design - Improves user comfort for all day use
- Variable Speed Trigger with Forward-Reverse Lever
  - For increased control
- Belt Clip - Frees up hands for other important tasks
- Lock-On Button - For extended use applications
- Strong Bit Tip Magnet - Maximizes control when driving long screws

**NEW! SG45**

Drywall Screwgun



## Specifications

Rating	120V
Amperage	7.0
No Load RPM	0-2,500
Torque (in./lbs.)	179
Length (in.)	11.2"
Weight (lbs.)	3.2



See pages 210-213, 215 for drill accessories.

## Features

- 7.0 Amps, 0-2,500 RPM
- Compact Design - Increased comfort and control to drive screws all day
- Ergonomic Design - Contoured grip is designed to maximize comfort and minimize fatigue
- Posi-Lok™ Nose Piece Design (patent pending)
  - Retains depth setting when removed and eliminates time consuming depth readjustments
- 2,500 RPM - Provides optimum speed for heavy screw driving
- 179 in. lbs. of Torque - Best torque to weight ratio in its class
- One Hand Adjustable and Removable Nose Piece - Fast and easy adjustments whether working in a variety of materials or tight spaces
- Metal Gear Housing - For Maximum Jobsite Durability
- Unique Trigger Design - Improves user comfort for all day use
- Variable Speed Trigger with Forward-Reverse Lever
  - For increased control
- Belt Clip - Frees up hands for other important tasks
- Lock-On Button - For extended use applications
- Strong Bit Tip Magnet - Maximizes control when driving long screws

**NEW! SG25M**

High Torque Screwgun



## NEW! SG25MT

TEK Screwgun



### Features

- 7.0 Amps, 0-2,500 RPM
- Compact Design - Increased comfort and control to drive screws all day
- Ergonomic Design - Contoured grip is designed to maximize comfort and minimize fatigue
- Posi-Lok™ Nose Piece Design (patent pending)
  - Retains depth setting when removed and eliminates time consuming depth readjustments
- 2,500 RPM - Provides optimum speed for heavy duty screw driving
- 179 in. lbs. of Torque - Best torque to weight ratio in its class
- One Hand Adjustable and Removable Nose Piece - Fast and easy adjustments whether working in a variety of materials or tight spaces
- Metal Gear Housing - For Maximum Jobsite Durability
- Unique Trigger Design - Improves user comfort for all day use
- Variable Speed Trigger with Forward-Reverse Lever - For increased control
- Belt Clip - Frees up hands for other important tasks
- Lock-On Button - For extended use applications
- Strong Bit Tip Magnet - Maximizes control when driving long screws
- Designed for driving Hex Head TEK screws

### Specifications

Rating	120V
Amperage	7.0
No Load RPM	0-2,500
Torque (in./lbs.)	179
Length (in.)	11.2"
Weight (lbs.)	3.2

### Includes

1/4", 5/16", 3/8" Nut Drivers

 See pages 210-213, 215 for drill accessories.

## 1132VSR

3/8" Right-Angle Drill



### Features

- 3.8 Amps, 0-1100 RPM
- Low profile design for drilling in close quarters
- Easy to actuate paddle-type switch
- Variable speed dial for matching speed to the application

### Specifications

Rating	120V
Amperage	3.8
No Load RPM	0-1,100
Spindle Size	3/8"
Maximum Hole Diameter in Wood (In.)	1"
Hole Saw	1"
Maximum Hole Diameter in Steel (In.)	3/8"
Hole Saw	3/8"
Length (in.)	11-3/4"
Weight (lbs.)	4.0

### Includes

Chuck ..... 3 608 571 000  
Chuck Key ..... CRK005

 See pages 191-209 for drill accessories.

## 1005VSRK

3/8" Drill



### Features

- 5.5 Amps, 0-2,500 RPM
- 3/8" keyless chuck
- Variable speed trigger with reversing switch - For greater control
- Lock-on switch - For ease of operation
- For increased comfort
- Ergonomic handle

### Specifications

Rating	120 V AC
Amperage	5.5
No Load RPM	0-2,500
Spindle Size	3/8"-24
Maximum Hole Diameter in Wood (In.)	1"
Paddle Bit	1"
Hole Saw	1"
Maximum Hole Diameter in Steel (In.)	3/8"
Twist Drill Bit	10"
Length (in.)	10"
Weight (lbs.)	3.9

### Includes

Carrying Case ..... Included

 See pages 191-209 for drill accessories.



Carrying Case  
Included

## Specifications

	1012VSR	1011VSR
Rating	120V	120V
Amperage	6.5	6.5
No Load RPM	0-1,100	0-1,100
Torque (in./lbs.)	279	279
Spindle Size	1/2"-20	1/2"-20
Maximum Hole Diameter in Wood (in.)		
Paddle Bit	1-1/2"	1-1/2"
Self-Feed Bit	1"	1"
Hole Saw	2-1/2"	2-1/2"
Auger Bit	1"	1"
Maximum Hole Diameter in Steel (in.)		
Twist Drill Bit	3/8"	3/8"
Hole Saw	1-1/2"	1-1/2"
Length (in.)	9-7/8"	9-7/8"
Weight (lbs.)	4.5	4.6

## Includes

Auxiliary Handle..... 2 602 025 094  
**1011VSR** Chuck Key ..... 3 608 571 539



## Features

- 6.5 Amp all ball bearing motor, 0-1100 RPM
- One-handed keyless chuck
- Variable speed, soft grip trigger, with reversing switch - For greater control
- Two finger trigger design and lock-on button - For ease of operation
- Ergonomic handle with soft grip - For increased comfort
- Precision cut steel gears
- Magnesium front housing - For increased durability
- 360° auxiliary handle with optional depth gauge
- Extra long 8' rubber cord with 3-prong grounded plug

## 1012VSR 3/8" High-Torque Drill

**1011VSR** 3/8" High-Torque Drill (not shown)



**1011VSR** also features  
 • Heavy-duty keyed chuck

## Specifications

Rating	120V
Amperage	7.5
No Load RPM	0-2,100
Torque (in./lbs.)	215
Spindle Size	1/2"-20
Maximum Hole Diameter in Wood (in.)	
Paddle Bit	1"
Self-Feed Bit	
Not Recommended, Drill is too fast	
Hole Saw	1-3/8"
Auger Bit	
Not Recommended, Drill is too fast	
Maximum Hole Diameter in Steel (in.)	
Twist Drill Bit	3/8"
Hole Saw	1-3/8"
Length (in.)	10"
Weight (lbs.)	4.8

## Includes

Auxiliary Handle..... 2 602 025 094  
 Chuck Key..... 3 608 571 539



## Features

- 7.5 Amp all ball bearing motor, 0-2100 RPM
- Heavy duty, keyed chuck
- Variable speed, soft grip trigger, with reversing switch - For greater control
- Two finger trigger design and lock-on button - For ease of operation
- Ergonomic handle with soft grip - For increased comfort
- Precision cut steel gears
- Magnesium front housing - For increased durability
- 360° auxiliary handle with optional depth gauge
- Extra long 8' rubber cord with 3-prong grounded plug

## 1030VSR

3/8" High-Speed Drill



## Specifications

Rating	120 V AC
Amperage	5.2
No Load RPM	0-1,000/0-1,900
Torque (in./lbs.)	DUAL
Spindle Size	1/2"-20
Maximum Hole Diameter in Wood (in.)	
Hole Saw	1-1/2"
Length (in.)	12-1/4"
Weight (lbs.)	4.6

## Includes

Chuck Key..... CRK002  
 Auxiliary Handle..... 1 612 025 024



## Features

- 5.2 Amps, 0-1000 RPM, 0-1900 RPM
- 2 Speed gear box
- Heavy duty, keyed chuck
- Trigger with variable speed dial trigger and reversing switch
- Ergonomic handle
- Lock-on button

## 1169VSR

1/2" Drill with Dual Torque Ranges







### 1013VSR

1/2" High-Speed Drill



#### Features

- 6.5 Amp all ball bearing motor, 0-850 RPM
- Heavy duty keyed chuck
- Variable speed, soft grip trigger, with reversing switch - For greater control
- Two finger trigger design and lock-on button - For ease of operation
- Ergonomic handle with soft grip - For increased comfort
- Precision cut steel gears
- Magnesium front housing
- For increased durability - Provides maximum control in tough applications
- 360° auxiliary handle with optional depth gauge
- Extra long 8' rubber cord with 3-prong grounded plug



See pages 191-209 for  
drill accessories.

#### Specifications

Rating	120 V AC
Amperage	6.5
No Load RPM	0-850
Torque (in./lbs.)	373
Spindle Size	1/2"-20
Maximum Hole Diameter in Wood (In.)	
Paddle Bit	1-1/2"
Self-Feed Bit	2-1/4"
Hole Saw	3-5/8"
Auger Bit	1-3/8"
Maximum Hole Diameter in Steel (In.)	
Twist Drill Bit	1/2"
Hole Saw	2"
Length (in.)	10-9/10"
Weight (lbs.)	5.1

#### Includes

Auxiliary Handle..... 2 602 025 094  
Chuck Key..... 2 610 348 635

### 1034VSR

1/2" High-Torque Drill



#### Features

- 8.0 Amp all ball bearing motor, 0-550 RPM
- Heavy duty, keyed chuck
- Variable speed, soft grip trigger, with reversing switch - For greater control
- Two finger trigger design and lock-on button - For ease of operation
- Ergonomic handle with soft grip - For increased comfort
- Precision cut steel gears
- Magnesium front housing - For increased durability
- 360° auxiliary handle with optional depth gauge
- Extra long 8' rubber cord with 3-prong grounded plug



See pages 191-209 for  
drill accessories.

#### Specifications

Rating	120V
Amperage	8.0
No Load RPM	0-550
Torque (in./lbs.)	767
Spindle Size	1/2"-20
Maximum Hole Diameter in Wood (In.)	
Paddle Bit	1-1/2"
Self-Feed Bit	2-9/16"
Hole Saw	4-1/2"
Auger Bit	1-1/2"
Maximum Hole Diameter in Steel (In.)	
Twist Drill Bit	1/2"
Hole Saw	3"
Length (in.)	11-1/5"
Weight (lbs.)	5.3

#### Includes

Auxiliary Handle..... 2 602 025 094  
Chuck Key..... 2 610 348 635

### 1033VSR 1/2" High-Speed Drill

1035VSR 1/2" High-Speed Drill (not shown)



**1035VSR also features**

- One-handed keyless chuck



#### Features

- 8.0 Amp all ball bearing motor, 0-850 RPM
- Heavy duty, keyed chuck
- Variable speed, soft grip trigger, with reversing switch - For greater control
- Two finger trigger design and lock-on button - For ease of operation
- Ergonomic handle with soft grip - For increased comfort
- Precision cut steel gears
- Magnesium front housing - For increased durability
- 360° auxiliary handle with optional depth gauge
- Extra long 8' rubber cord with 3-prong grounded plug



See pages 191-209 for  
drill accessories.

#### Specifications

	1033VSR	1035VSR
Rating	120V	120V
Amperage	8.0	8.0
No Load RPM	0-850	0-850
Torque (in./lbs.)	472	472
Spindle Size	1/2"-20	1/2"-20
Maximum Hole Diameter in Wood (In.)		
Paddle Bit	1-1/2"	1-1/2"
Self-Feed Bit	2-9/16"	2-9/16"
Hole Saw	3-5/8"	3-5/8"
Auger Bit	1-1/2"	1-1/2"
Maximum Hole Diameter in Steel (In.)		
Twist Drill Bit	1/2"	1/2"
Hole Saw	2-1/2"	2-1/2"
Length (in.)	11-1/8"	11-1/8"
Weight (lbs.)	5.3	5.0

#### Includes

Auxiliary Handle..... 2 602 025 094  
Chuck Key..... 2 610 348 635

### 1462VS

3/8" Tapper



#### Features

- 4.6 Amp. 0-580 RPM Forward, 0-1000 RPM Reverse
- Variable speed with adjusting knob - To match correct speed to job application
- "Push" into work for forward operation (clockwise)
- "Pull" away from work for reverse rotation (counterclockwise)
- Self-aligning chuck coupling - Allows tap to straighten if started crooked
- Magnesium front housing
- Comfortable, contoured handle.

#### Specifications

Rating	120 V AC
Amperage	4.6
No Load RPM	
Forward	0-580
Reverse	0-1,000
Capacity	
Tap in Mild Steel	1/8" to 3/8"
Length (in.)	15"
Weight (lbs.)	5.75

#### Includes

Chuck..... 2 608 573 004  
Allen Key..... 1 607 950 002

## BOSCH RapidFeed™ Spade Bits

**Efficient** Cut 3X faster than standard spade bits.

**Patented RapidFeed™ Tip** Pulls the bit through the wood and reduces the pressure necessary to drill a hole.

**Cutting Spurs** Score outside of hole, reducing splintering and leaving a smooth hole.

### RapidFeed™ Tip

Threaded tip pulls the bit through the wood and reduces the pressure necessary to drill a hole.

**Aggressive Cutting Edges**  
For a fast, clean cut.

### Cutting Spurs

Scores the outside of the hole which reduces splintering and leaves a smooth hole.

### 1/4" Hex Shank

Will not spin in drill chuck.

### Power Groove

For use in all quick change adapters.



SB5005

### RapidFeed™ Spade Bit Sets

Bosch RapidFeed™ spade bits cut 3X faster than standard spade bits thanks to the innovative RapidFeed™ tip. This tip is threaded like a wood screw and literally pulls the bit through the wood for fast cutting action. The pulling action of the RapidFeed™ tip means less pressure is required behind the bit making overhead applications easy on the arms.

- Aggressive cutting edges are specially designed with an increased angle to cut at the rapid speed the bit is being pulled through the wood resulting in a clean, fast cut
- Cutting spurs on the edge of the bit score the outer edge of the hole before the cutting edge removes the material. The result is a cleaner, smoother hole with reduced splintering and less breakout at the back of the material
- Great for plumbers, electricians and HVAC contractors. Use in materials including hardwoods, composites, treated lumber, railroad ties and other wood products
- All 6" spade bits have 1/4" hex shank

Item #	Description
SB5003	3 pc. RapidFeed™ spade bit set
SB5005	6 pc. RapidFeed™ spade bit set with extension
SB5006	6 pc. RapidFeed™ spade bit set
SB5006P	6 pc. RapidFeed™ spade bit set in pouch
SB5013P	13 pc. RapidFeed™ spade bit set in pouch



### RapidFeed™ Spade Bits

Item #	Diameter	Overall Length	Quantity
SB1001	1/4"	6"	1
SB1002	5/16"	6"	1
SB1003	3/8"	6"	1
SB1004	7/16"	6"	1
SB1005	1/2"	6"	1
SB1006	9/16"	6"	1
SB1007	5/8"	6"	1
SB1008	11/16"	6"	1
SB1009	3/4"	6"	1
SB1010	13/16"	6"	1
SB1011	7/8"	6"	1
SB1012	15/16"	6"	1
SB1013	1"	6"	1
SB1015	1-1/8"	6"	1
SB1017	1-1/4"	6"	1
SB1019	1-3/8"	6"	1
SB1021	1-1/2"	6"	1
LSB1003	3/8"	16"	1
LSB1005	1/2"	16"	1
LSB1007	5/8"	16"	1
LSB1009	3/4"	16"	1
LSB1011	7/8"	16"	1
LSB1013	1"	16"	1
SBE1006	N/A	6" extension	1
SBE1012	N/A	12" extension	1

### Stubby Spade Bits

Item #	Diameter	Overall Length	Quantity
SBS1003	3/8"	4"	1
SBS1005	1/2"	4"	1
SBS1007	5/8"	4"	1
SBS1009	3/4"	4"	1
SBS1011	7/8"	4"	1
SBS1013	1"	4"	1
SBS1015	1-1/8"	4"	1
SBS1017	1-1/4"	4"	1
SBS1021	1-1/2"	4"	1
SBS5003	1/2", 3/4", 1"	4"	3

NOTE: Drill bits (or extension + drill bit) in excess of 8" should never exceed 600 RPM.



# Type I Power Band Spur Auger

**Quick Change Hex Shank**  
For power drill or impact driver

**Sharp Cutting Edge with Spur**  
designed for fast, clean holes

**Full Length Heat Treatment**  
For heavy duty application

**Solid Center Flutes**  
Provide added rigidity

**Low-friction Flutes**  
Black oxide coating reduces chip clogging

**Heavy Duty Self-feeding Screw Point**  
For soft and hard woods



## Type I Power Band Spur Auger Bits

Bosch Type I spur augers feature a sharpened spur cutting edge designed for fast, clean holes.

- Solid center flute provides added rigidity
- Low-friction flute with black oxide coating reduces chip clogging
- Self-feeding screw point for soft and hard woods
- Universal power groove hex shank




Item #	Bulk Item #	Diameter	Flute Length	Overall Length	Shank Size	Item Quantity	Bulk Quantity
ASPST04	ASPSB04	1/4"	5"	7-1/2"	3/16"	1	5
ASPST05	ASPSB05	5/16"	5"	7-1/2"	1/4"	1	5
ASPST06	ASPSB06	3/8"	5"	7-1/2"	1/4"	1	5
ASPST07	ASPSB07	7/16"	5"	7-1/2"	1/4"	1	5
ASPST08	ASPSB08	1/2"	5"	7-1/2"	1/4"	1	5
ASPST09	ASPSB09	9/16"	5"	7-1/2"	5/16"	1	5
ASPST10	ASPSB10	5/8"	5"	7-1/2"	5/16"	1	5
ASPST11	ASPSB11	11/16"	5"	7-1/2"	5/16"	1	5
ASPST12	ASPSB12	3/4"	5"	7-1/2"	5/16"	1	5
ASPST13	ASPSB13	13/16"	5"	7-1/2"	5/16"	1	5
ASPST14	ASPSB14	7/8"	5"	7-1/2"	5/16"	1	5
ASPST15	ASPSB15	15/16"	5"	7-1/2"	5/16"	1	5
ASPST16	ASPSB16	1"	5"	7-1/2"	5/16"	1	5
ASPST18	ASPSB18	1-1/8"	5"	7-1/2"	7/16"	1	3
ASPST20	ASPSB20	1-1/4"	5"	7-1/2"	7/16"	1	3
ASPST22	ASPSB22	1-3/8"	5"	7-1/2"	7/16"	1	3
ASPST24	ASPSB24	1-1/2"	5"	7-1/2"	7/16"	1	3
ASPMTO6	ASPMBO6	3/8"	10"	13"	1/4"	1	5
ASPMTO7	ASPMBO7	7/16"	10"	13"	1/4"	1	5
ASPMTO8	ASPMBO8	1/2"	10"	13"	1/4"	1	5
ASPMTO9	ASPMBO9	9/16"	10"	13"	5/16"	1	5
ASPMTO10	ASPMBO10	5/8"	10"	13"	5/16"	1	5
ASPMTO11	ASPMBO11	11/16"	10"	13"	5/16"	1	5
ASPMTO12	ASPMBO12	3/4"	10"	13"	5/16"	1	5
ASPMTO13	ASPMBO13	13/16"	10"	13"	5/16"	1	5
ASPMTO14	ASPMBO14	7/8"	10"	13"	5/16"	1	5
ASPMTO15	ASPMBO15	15/16"	10"	13"	5/16"	1	5
ASPMTO16	ASPMBO16	1"	10"	13"	5/16"	1	5
ASPMTO18	ASPMBO18	1-1/8"	10"	13"	7/16"	1	3
ASPMTO20	ASPMBO20	1-1/4"	10"	13"	7/16"	1	3
ASPMTO22	ASPMBO22	1-3/8"	10"	13"	7/16"	1	3
ASPMTO24	ASPMBO24	1-1/2"	10"	13"	7/16"	1	3
ASPLTO6	ASPLBO6	3/8"	15"	17"	1/4"	1	5
ASPLTO7	ASPLBO7	7/16"	15"	17"	1/4"	1	5
ASPLTO8	ASPLBO8	1/2"	15"	17"	1/4"	1	5
ASPLTO9	ASPLBO9	9/16"	15"	17"	5/16"	1	5
ASPLTO10	ASPLBO10	5/8"	15"	17"	5/16"	1	5
ASPLTO11	ASPLBO11	11/16"	15"	17"	5/16"	1	5
ASPLTO12	ASPLBO12	3/4"	15"	17"	5/16"	1	5
ASPLTO13	ASPLBO13	13/16"	15"	17"	5/16"	1	5
ASPLTO14	ASPLBO14	7/8"	15"	17"	5/16"	1	5
ASPLTO15	ASPLBO15	15/16"	15"	17"	5/16"	1	5
ASPLTO16	ASPLBO16	1"	15"	17"	5/16"	1	5
ASPLTO18	ASPLBO18	1-1/8"	15"	17"	7/16"	1	3
ASPLTO20	ASPLBO20	1-1/4"	15"	17"	7/16"	1	3
ASPLTO22	ASPLBO22	1-3/8"	15"	17"	7/16"	1	3
ASPLTO24	ASPLBO24	1-1/2"	15"	17"	7/16"	1	3

NOTE: Drill bits (or extension + drill bit) in excess of 8" should never exceed 600 RPM.



## Type II Power Band Ship Auger

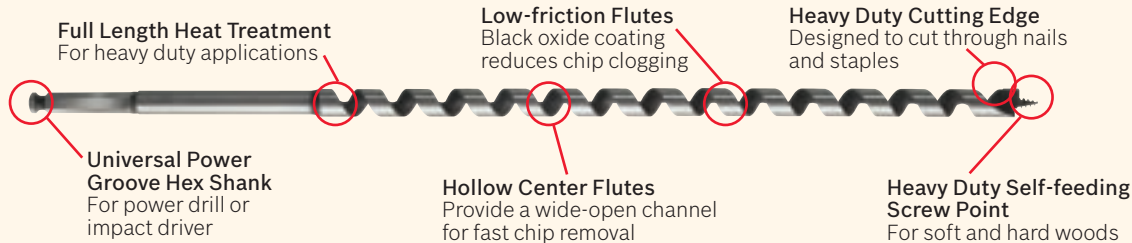

### Type II Power Band Ship Auger Bits

Bosch Type II ship augers have an exclusive Power Band feature that increases bit strength and durability allowing for heavy duty cutting through nails and staples.

- Hollow center flute provides wide-open channel for fast chip removal
- Low-friction flute with black oxide coating reduces chip clogging
- Self-feeding screw point for soft and hard woods
- Universal power groove hex shank for power drill or impact driver



Item #	Bulk Item #	Diameter	Flute Length	Overall Length	Shank Size	Item Quantity	Bulk Quantity
ASHST08	ASHSB08	1/2"	5"	7-1/2"	5/16"	1	5
ASHST09	ASHSB09	9/16"	5"	7-1/2"	7/16"	1	5
ASHST10	ASHSB10	5/8"	5"	7-1/2"	7/16"	1	5
ASHST11	ASHSB11	11/16"	5"	7-1/2"	7/16"	1	5
ASHST12	ASHSB12	3/4"	5"	7-1/2"	7/16"	1	5
ASHST13	ASHSB13	13/16"	5"	7-1/2"	7/16"	1	5
ASHST14	ASHSB14	7/8"	5"	7-1/2"	7/16"	1	5
ASHST16	ASHSB16	1"	5"	7-1/2"	7/16"	1	5
ASHST18	ASHSB18	1-1/8"	5"	7-1/2"	7/16"	1	3
ASHST20	ASHSB20	1-1/4"	5"	7-1/2"	7/16"	1	3
ASHST22	ASHSB22	1-3/8"	5"	7-1/2"	7/16"	1	3
ASHST24	ASHSB24	1-1/2"	5"	7-1/2"	7/16"	1	3
ASHLT06	ASHLB06	3/8"	15"	17"	5/16"	1	5
ASHLT07	ASHLB07	7/16"	15"	17"	5/16"	1	5
ASHLT08	ASHLB08	1/2"	15"	17"	5/16"	1	5
ASHLT09	ASHLB09	9/16"	15"	17"	7/16"	1	5
ASHLT10	ASHLB10	5/8"	15"	17"	7/16"	1	5
ASHLT11	ASHLB11	11/16"	15"	17"	7/16"	1	5
ASHLT12	ASHLB12	3/4"	15"	17"	7/16"	1	5
ASHLT13	ASHLB13	13/16"	15"	17"	7/16"	1	5
ASHLT14	ASHLB14	7/8"	15"	17"	7/16"	1	5
ASHLT15	ASHLB15	15/16"	15"	17"	7/16"	1	5
ASHLT16	ASHLB16	1"	15"	17"	7/16"	1	5
ASHLT17	ASHLB17	1-1/16"	15"	17"	7/16"	1	3
ASHLT18	ASHLB18	1-1/8"	15"	17"	7/16"	1	3
ASHLT20	ASHLB20	1-1/4"	15"	17"	7/16"	1	3
ASHLT22	ASHLB22	1-3/8"	15"	17"	7/16"	1	3
ASHLT24	ASHLB24	1-1/2"	15"	17"	7/16"	1	3

### Extended Length Bits

Item #	Diameter	Flute Length	Overall Length	Shank Size	Quantity
ASHXB0711	11/16"	19"	24"	7/16"	1 (tubed)
ASHXB1011	11/16"	19"	24"	5/8"	5 (bulk)
ASHXB0713	13/16"	19"	24"	7/16"	1 (tubed)
ASHXB1013	13/16"	19"	24"	5/8"	5 (bulk)
ASHXB0715	15/16"	19"	24"	7/16"	1 (tubed)
ASHXB1015	15/16"	19"	24"	5/8"	5 (bulk)
ASHXB0717	1-1/16"	19"	24"	7/16"	1 (tubed)
ASHXB1017	1-1/16"	19"	24"	5/8"	3 (bulk)

NOTE: Drill bits (or extension + drill bit) in excess of 8" should never exceed 600 RPM.

## Self-feed Bits

Use Bosch self-feed bits to bore holes for running conduit and pipe in wood. Can use with portable drills or stationary boring machines. Each bit features a 1/2" shank with three flat and double-ended, replaceable screw points.

- Includes replaceable double-ended lead screw points and 1/8" hex key
- Sizes 3-5/8" and 4-5/8" feature double cutter blades (chip-lifters) and replaceable shanks



Item #	Diameter
SF1001	1"
SF1121	1-1/8"
SF1251	1-1/4"
SF1371	1-3/8"
SF1501	1-1/2"
SF1751	1-3/4"
SF2001	2"
SF2121	2-1/8"
SF2251	2-1/4"
SF2561	2-9/16"
SF3001	3"
SF3621	3-5/8"
SF4621	4-5/8"

## Forstner Bits

Forstner bits bore perfectly smooth, flat-bottomed holes in wood. Holes are precise, flat and splinter-free even in end grain and knots. Ideal for drilling decorative holes used in fine woodworking and especially well-suited for severe angles and overlapping holes. Bosch forstner bits are fashioned from a chrome steel alloy with a 3/8" shank and are suitable for precision drilling with portable drills or stationary machines.

- Item B700 is a 7 piece set in a wood case that includes bit sizes 1/4", 3/8", 1/2", 5/8", 3/4", 7/8" and 1"
- Item FB1600 is a 16 piece set in a wood case that includes all available bit sizes




Item #	Diameter
FB004	1/4"
FB006	3/8"
FB008	1/2"
FB010	5/8"
FB012	3/4"
FB014	7/8"
FB016	1"
FB018	1-1/8"
FB020	1-1/4"
FB022	1-3/8"
FB024	1-1/2"
FB026	1-5/8"
FB028	1-3/4"
FB030	1-7/8"
FB032	2"
FB034	2-1/8"
FB1600	1 Each, All Above Sizes
FB700	1/4", 3/8", 1/2", 5/8", 3/4", 7/8", 1"

## Bell Hanger / Installer Bits

The Bosch line of Bell Hanger / Installer bits is designed with the installer and low-volt electrician in mind.

These unique bits feature a hole in the flute that allows the user to insert a wire through the bit and tie-off a wire or cable. By pulling the bit with the attached cable back through the hole, an installer can fish cables through walls, floors, studs and joists with ease.

Made of High Speed Steel, these bits are the contractor's choice for drilling through deep wood applications. The 118° point ensures fast, accurate starts and the flutes are coated in black oxide for quick chip removal. These Bosch bits feature a 3-flute shank which eliminates spinning in the chuck.



## Brad Point Bits

Brad point drill bits are designed to drill smooth, clean cuts in wood. The brad point tip provides easy positioning and accurate starts. Extra-wide flutes yield fast chip removal.

- Designed for use in portable drills and drill presses



Item #	Diameter	Shank Diameter	Overall Length	Flute Length
B14601	1/8"	1/8"	2-3/4"	1-5/8"
B14602	3/16"	3/16"	3-1/2"	2-5/16"
B14603	1/4"	1/4"	3-5/16"	2-1/4"
B14604	5/16"	5/16"	4-7/16"	2-3/4"
B14605	3/8"	5/16"	5-3/16"	3-1/4"
B14606	7/16"	5/16"	5-9/16"	3-1/2"
B14607	1/2"	5/16"	5-15/16"	3-1/2"
B14609	5/8"	3/8"	7"	4-1/4"
B14615	1/4", 5/16", 3/8", 7/16", 1/2", 5/8"	Various	Various	Various



## Hinge Boring Bits

Carbide-tipped boring bits for European type hinges feature a centering point, two outside scoring teeth and two straight cutting teeth. Carbide-tipped twist hinge boring bits feature a centering point and outside scoring tips and utilize a 10 mm shank with a locking flat and adjustable top screw for automatic and semi-automatic boring machines.

- NOT for use with three-jaw chucks

Item #	Diameter	Description
T15005	5 mm	Right twist
T15015	5 mm	Left twist
T15008	8 mm	Right twist
T15018	8 mm	Left twist
T15010	10 mm	Right twist
T15110	10 mm	Left twist
T15215	15 mm	For European type hinges
T15020	20 mm	For European type hinges
T15025	25 mm	For European type hinges
T15026	26 mm	For European type hinges
T15126	26 mm	For European type hinges
T15030	30 mm	For European type hinges
T15035	35 mm	For European type hinges
T15138	38 mm	For European type hinges
T15040	40 mm	For European type hinges

Item #	Bulk Item #	Diameter	Overall Length	Item Quantity	Bulk Quantity
BH1001	BH1001B	1/4"	12"	1	6
BH1002	BH1002B	5/16"	12"	1	6
BH1003	BH1003B	3/8"	12"	1	6
BH1005	BH1005B	1/2"	12"	1	6
BH2001	BH2001B	1/4"	18"	1	6
BH2002	BH2002B	5/16"	18"	1	6
BH2003	BH2003B	3/8"	18"	1	6
BH2005	BH2005B	1/2"	18"	1	6
BH3001	BH3001B	1/4"	24"	1	6
BH3002	BH3002B	5/16"	24"	1	6
BH3003	BH3003B	3/8"	24"	1	6
BH3005	BH3005B	1/2"	24"	1	6

## BOSCH Professional Drilling

### TITANIUM



#### Titanium coating

**Applications:** Designed for repetitive heavy-duty drilling in common stainless steels, carbon and alloy steels, aluminum, soft case iron, wood, wood composites and plastic. Available in jobber length with 3/8" reduced shank.

- Dramatically reduces heat and friction between bit and workpiece, making bits last up to 6X longer than standard HSS bits.
- Allows faster drilling speeds.
- Surface hardness in excess of 80 HRC to penetrate tough materials, including common stainless steels.

#### Speed Helix

- Faster penetration, easier drilling, reduced heat.
- Extended drill bit life, extended cordless battery life.

#### 135° split point

- Starts drilling on contact.
- No walking or skating.
- No center punch required.

### BLACK OXIDE



#### Black oxide heat treatment

**Applications:** Designed for general purpose heavy-duty drilling in carbon and alloy steels, aluminum, soft cast iron, wood, wood composites and plastic. Available in jobber length, stubby length, extended length (aircraft), 3/8" reduced shank, 1/2" reduced shank (Silver & Deming).

- Reduces friction between bit and workpiece.
- Extends drill bit life.

#### Speed Helix

- Faster penetration, easier drilling, reduced heat.
- Extended drill bit life, extended cordless battery life.

#### 135° split point

- Starts drilling on contact.
- No walking or skating.
- No center punch required.

### COBALT



#### Cobalt



**Applications:** Designed for heavy-duty drilling in hardened stainless steels, cast iron and titanium. Available in jobber length.

- Cobalt formulation provides overall bit hardness of 66-68 HRC for penetration of very tough, abrasive materials.
- Able to withstand very high temperature drilling applications for extended periods of time.
- Under high drilling temperatures, bits stay sharper longer than standard HSS.
- Thicker web increases rigidity in hard materials.

#### 135° split point


- Starts drilling on contact.
- No walking or skating.
- No center punch required.

## Material Chart

<div>Legend</div> <div><div>✓ Recommended</div><div>✓ OK to use</div><div>✓ Not recommended</div></div>	Wood	Plastic	Light gauge metal	High carbon steel	Aluminum & alloy steel	Cast iron	Stainless steel
<div>Titanium</div> <div></div>	✓	✓	✓	✓	✓	✓	✓
<div>Black oxide</div> <div></div>	✓	✓	✓	✓	✓	✓	✓
<div>Cobalt</div> <div></div>	✓	✓	✓	✓	✓	✓	✓



**TI18**

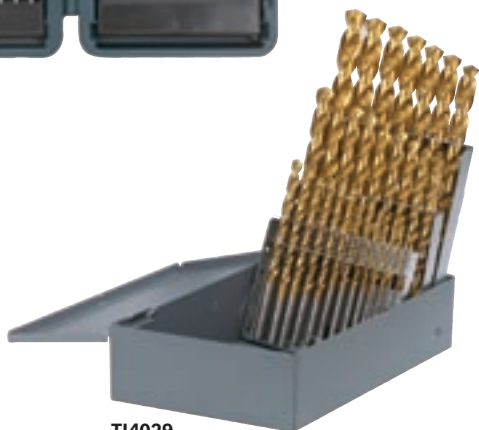

**TI4029**

## Titanium Coated Drill Bit Sets

Bosch titanium drill bits offer the best durability and speed for general purpose drilling applications. Best for cutting holes into metal and work equally well in wood and plastic drilling. Use in steel, copper, aluminum, brass, oak, maple, MDF, pine, PVC, polycarbonate, acrylic, ABS, nylon, composite materials and common stainless steel.

- Titanium drill bits last 6X longer than High Speed Steel bits. The durability comes from the super hard titanium nitride coating. While the hardness of the titanium coating protects the bits from chipping and cracking, the lubricity protects from heat build up which is the number one cause of product failure. Surface hardness in excess of 80 HRC allows for penetration of tough materials including common stainless steel
- The speed helix design penetrates 3X faster than standard bits. The benefits include easier drilling, reduced heat, extended drill bit life and extended cordless battery life
- 135° split point starts on contact with no walking or skating and no center punch is required

Item #	# of Pieces	Description
<b>TI10</b>	10	10 pc. set in blow-molded plastic case
<b>TI4013</b>	13	Fractional jobber length 1/16" to 1/4" by 64ths metal index
<b>TI15</b>	15	15 pc. set in blow-molded plastic case
<b>TI18</b>	18	18 pc. set in blow-molded plastic case
<b>TI4029</b>	29	Fractional jobber length 1/16" to 1/2" by 64ths metal index



## Titanium Coated Drill Bits

Item #	Diameter	Overall Length	Shank Diameter	Quantity
<b>Carded Items</b>				
TI2131	1/16"	1-7/8"	1/16"	2
TI2132	5/64"	2"	5/64"	2
TI2133	3/32"	2-1/4"	3/32"	2
TI2134	7/64"	2-5/8"	7/64"	2
TI2135	1/8"	2-3/4"	1/8"	2
TI2136	9/64"	2-7/8"	9/64"	1
TI2137	5/32"	3-1/8"	5/32"	1
TI2138	11/64"	3-1/4"	11/64"	1
TI2139	3/16"	3-1/2"	3/16"	1
TI2140	13/64"	3-5/8"	13/64"	1
TI2141	7/32"	3-3/4"	7/32"	1
TI2142	15/64"	13-7/8"	15/64"	1
TI2143	1/4"	4"	1/4"	1
TI2144	17/64"	4-1/8"	17/64"	1
TI2145	9/32"	4-1/4"	9/32"	1
TI2146	19/64"	4-3/8"	19/64"	1
TI2147	5/16"	4-1/2"	5/16"	1
TI2148	21/64"	4-5/8"	21/64"	1
TI2149	11/32"	4-3/4"	11/32"	1
TI2150	23/64"	4-7/8"	23/64"	1
TI2151	3/8"	5"	3/8"	1
TI2152	25/64"	5-1/8"	3/8"	1
TI2153	13/32"	5-1/4"	3/8"	1
TI2154	27/64"	5-3/8"	3/8"	1
TI2155	7/16"	5-1/2"	3/8"	1
TI2156	29/64"	5-5/8"	3/8"	1
TI2157	15/32"	5-3/4"	3/8"	1
TI2158	31/64"	5-7/8"	3/8"	1
TI2159	1/2"	6"	3/8"	1
<b>Bulk Items</b>				
TI4131	1/16"	1-7/8"	1/16"	12
TI4132	5/64"	2"	5/64"	12
TI4133	3/32"	2-1/4"	3/32"	12
TI4134	7/64"	2-5/8"	7/64"	12
TI4135	1/8"	2-3/4"	1/8"	12
TI4136	9/64"	2-7/8"	9/64"	12
TI4137	5/32"	3-1/8"	5/32"	12
TI4138	11/64"	3-1/4"	11/64"	12
TI4139	3/16"	3-1/2"	3/16"	12
TI4140	13/64"	3-5/8"	13/64"	12
TI4141	7/32"	3-3/4"	7/32"	12
TI4142	15/64"	3-7/8"	15/64"	12
TI4143	1/4"	4"	1/4"	12
TI4144	17/64"	4-1/8"	17/64"	6
TI4145	9/32"	4-1/4"	9/32"	6
TI4146	19/64"	4-3/8"	19/64"	6
TI4147	5/16"	4-1/2"	5/16"	6
TI4148	21/64"	4-5/8"	21/64"	6
TI4149	11/32"	4-3/4"	11/32"	6
TI4150	23/64"	4-7/8"	23/64"	6
TI4151	3/8"	5"	3/8"	6
TI4152	25/64"	5-1/8"	3/8"	6
TI4153	13/32"	5-1/4"	3/8"	6
TI4154	27/64"	5-3/8"	3/8"	6
TI4155	7/16"	5-1/2"	3/8"	6
TI4156	29/64"	5-5/8"	3/8"	6
TI4157	15/32"	5-3/4"	3/8"	6
TI4158	31/64"	5-7/8"	3/8"	6
TI4159	1/2"	6"	3/8"	6

NOTE: Drill bits (or extension + drill bit) in excess of 8" should never exceed 600 RPM.



## Black Oxide Drill Bit Sets

Bosch black oxide bits offer superior durability, speed and selection for most general purpose applications. Best for cutting holes into metal and work equally well in wood and plastic drilling. Use in steel, copper, aluminum, brass, oak, maple, MDF, pine, PVC, polycarbonate, acrylic, ABS, nylon and composite materials.

- The speed helix design penetrates 3X faster than standard bits. The benefits include easier drilling, reduced heat, extended drill bit life and extended cordless battery life
- Triple tempered black oxide coated bits last 50% longer than regular high speed steel and offer reduced friction between bit and workpiece
- 135° split point starts on contact with no walking or skating and no center punch is required

Item #	# of Pieces	Description
BL0008	8	Fractional 1/2" reduced shank 9/16" to 1" by 16ths in metal index
BL10	10	10 pc. set in blow-molded plastic case
BL0013	13	Fractional jobber length 1/16" to 1/4" by 64ths in metal index
BL0015	15	Fractional jobber length 1/16" to 1/2" by 32nds in metal index
BL15	15	15 pc. set in blow-molded plastic case
BL20	20	20 pc. set in blow-molded plastic case
BL0021	21	Fractional jobber length 1/16" to 3/8" by 64ths in metal index
BL0026	26	Letter size jobber length A to Z in metal index
BL0029	29	Fractional jobber length 1/16" to 1/2" by 64ths in metal index
BL0060	60	Wire gauge jobber length # 1 to # 60 in metal index
BL4115	115	Fractional / letter / wire gauge jobber length in metal index



## Fractional Jobber Length Black Oxide Drill Bits

Item #	Diameter	Overall Length	Shank Diameter	Quantity
<b>Carded Items</b>				
BL2131	1/16"	1-7/8"	1/16"	2
BL2132	5/64"	2"	5/64"	2
BL2133	3/32"	2-1/4"	3/32"	2
BL2134	7/64"	2-5/8"	7/64"	2
BL2135	1/8"	2-3/4"	1/8"	2
BL2136	9/64"	2-7/8"	9/64"	1
BL2137	5/32"	3-1/8"	5/32"	1
BL2138	11/64"	3-1/4"	11/64"	1
BL2139	3/16"	3-1/2"	3/16"	1
BL2140	13/64"	3-5/8"	13/64"	1
BL2141	7/32"	3-3/4"	7/32"	1
BL2142	15/64"	3-7/8"	15/64"	1
BL2143	1/4"	4"	1/4"	1
BL2144	17/64"	4-1/8"	17/64"	1
BL2145	9/32"	4-1/4"	9/32"	1
BL2146	19/64"	4-3/8"	19/64"	1
BL2147	5/16"	4-1/2"	5/16"	1
BL2148	21/64"	4-5/8"	21/64"	1
BL2149	11/32"	4-3/4"	11/32"	1
BL2150	23/64"	4-7/8"	23/64"	1
BL2151	3/8"	5"	3/8"	1
BL2152	25/64"	5-1/8"	3/8"	1
BL2153	13/32"	5-1/4"	3/8"	1
BL2154	27/64"	5-3/8"	3/8"	1
BL2155	7/16"	5-1/2"	3/8"	1
BL2156	29/64"	5-5/8"	3/8"	1
BL2157	15/32"	5-3/4"	3/8"	1
BL2158	31/64"	5-7/8"	3/8"	1
BL2159	1/2"	6"	3/8"	1
<b>Bulk Items</b>				
BL4128	1/64"	3/4"	1/64"	12
BL4129	1/32"	1-3/8"	1/32"	12
BL4130	3/64"	1-3/4"	3/64"	12
BL4131	1/16"	1-7/8"	1/16"	12
BL4132	5/64"	2"	5/64"	12
BL4133	3/32"	2-1/4"	3/32"	12
BL4134	7/64"	2-5/8"	7/64"	12
BL4135	1/8"	2-3/4"	1/8"	12
BL4136	9/64"	2-7/8"	9/64"	12
BL4137	5/32"	3-1/8"	5/32"	12
BL4138	11/64"	3-1/4"	11/64"	12
BL4139	3/16"	3-1/2"	3/16"	12
BL4140	13/64"	3-5/8"	13/64"	12
BL4141	7/32"	3-3/4"	7/32"	12
BL4142	15/64"	3-7/8"	15/64"	12
BL4143	1/4"	4"	1/4"	12
BL4144	17/64"	4-1/8"	17/64"	6
BL4145	9/32"	4-1/4"	9/32"	6
BL4146	19/64"	4-3/8"	19/64"	6
BL4147	5/16"	4-1/2"	5/16"	6
BL4148	21/64"	4-5/8"	21/64"	6
BL4149	11/32"	4-3/4"	11/32"	6
BL4150	23/64"	4-7/8"	23/64"	6
BL4151	3/8"	5"	3/8"	6
BL4152	25/64"	5-1/8"	3/8"	6
BL4153	13/32"	5-1/4"	3/8"	6
BL4154	27/64"	5-3/8"	3/8"	6
BL4155	7/16"	5-1/2"	3/8"	6
BL4156	29/64"	5-5/8"	3/8"	6
BL4157	15/32"	5-3/4"	3/8"	6
BL4158	31/64"	5-7/8"	3/8"	6
BL4159	1/2"	6"	3/8"	6

NOTE: Drill bits (or extension + drill bit) in excess of 8" should never exceed 600 RPM.





## Extra Length (Aircraft) Black Oxide Drill Bits

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL2630	3/64"	6"	3/64"	1
BL2631	1/16"	6"	1/16"	1
BL2731	1/16"	12"	1/16"	1
BL2632	5/64"	6"	5/64"	1
BL2633	3/32"	6"	3/32"	1
BL2634	7/64"	6"	7/64"	1
BL2635	1/8"	6"	1/8"	1
BL2735	1/8"	12"	1/8"	1
BL2636	9/64"	6"	9/64"	1
BL2637	5/32"	6"	5/32"	1
BL2638	11/64"	6"	11/64"	1
BL2639	3/16"	6"	3/16"	1
BL2739	3/16"	12"	3/16"	1
BL2640	13/64"	6"	13/64"	1
BL2641	7/32"	6"	7/32"	1
BL2642	15/64"	6"	15/64"	1
BL2643	1/4"	6"	1/4"	1
BL2743	1/4"	12"	1/4"	1
BL2647	5/16"	6"	5/16"	1
BL2747	5/16"	12"	5/16"	1
BL2651	3/8"	6"	3/8"	1
BL2751	3/8"	12"	3/8"	1
BL2655	7/16"	6"	7/16"	1
BL2755	7/16"	12"	7/16"	1
BL2759	1/2"	12"	1/2"	1



## Fractional 1/2" Reduced Shank (Silver & Deming) Black Oxide Drill Bits

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL2160	33/64"	6"	1/2"	1
BL2161	17/32"	6"	1/2"	1
BL2162	35/64"	6"	1/2"	1
BL2163	9/16"	6"	1/2"	1
BL2164	37/64"	6"	1/2"	1
BL2165	19/32"	6"	1/2"	1
BL2166	39/64"	6"	1/2"	1
BL2167	5/8"	6"	1/2"	1
BL2168	41/64"	6"	1/2"	1
BL2169	21/32"	6"	1/2"	1
BL2170	43/64"	6"	1/2"	1
BL2171	11/16"	6"	1/2"	1
BL2172	45/64"	6"	1/2"	1
BL2173	23/32"	6"	1/2"	1
BL2174	47/64"	6"	1/2"	1
BL2175	3/4"	6"	1/2"	1
BL2176	49/64"	6"	1/2"	1
BL2178	51/64"	6"	1/2"	1
BL2179	13/16"	6"	1/2"	1
BL2180	53/64"	6"	1/2"	1
BL2177	25/32"	6"	1/2"	1
BL2181	27/32"	6"	1/2"	1
BL2182	55/64"	6"	1/2"	1
BL2183	7/8"	6"	1/2"	1
BL2184	57/64"	6"	1/2"	1
BL2185	29/32"	6"	1/2"	1
BL2186	59/64"	6"	1/2"	1
BL2187	15/16"	6"	1/2"	1
BL2188	61/64"	6"	1/2"	1
BL2189	31/32"	6"	1/2"	1
BL2190	63/64"	6"	1/2"	1
BL2191	1"	6"	1/2"	1
BL2192	1-1/64"	6"	1/2"	1
BL2193	1-1/32"	6"	1/2"	1
BL2195	1-1/16"	6"	1/2"	1
BL2197	1-3/32"	6"	1/2"	1
BL2199	1-1/8"	6"	1/2"	1

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL2201	1-5/32"	6"	1/2"	1
BL2203	1-3/16"	6"	1/2"	1
BL2207	1-1/4"	6"	1/2"	1
BL2211	1-5/16"	6"	1/2"	1
BL2215	1-3/8"	6"	1/2"	1
BL2219	1-7/16"	6"	1/2"	1
BL2223	1-1/2"	6"	1/2"	1



## Wire Gauge Black Oxide Drill Bits (Bulk)

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL4001	1	3-7/8"	0.2280"	12
BL4002	2	3-7/8"	0.2210"	12
BL4003	3	3-3/4"	0.2130"	12
BL4004	4	3-3/4"	0.2090"	12
BL4005	5	3-3/4"	0.2055"	12
BL4006	6	3-3/4"	0.2040"	12
BL4007	7	3-5/8"	0.2010"	12
BL4008	8	3-5/8"	0.1990"	12
BL4009	9	3-5/8"	0.1960"	12
BL4010	10	3-5/8"	0.1935"	12
BL4011	11	3-1/2"	0.1910"	12
BL4012	12	3-1/2"	0.1890"	12
BL4013	13	3-1/2"	0.1850"	12
BL4014	14	3-3/8"	0.1820"	12
BL4015	15	3-3/8"	0.1800"	12
BL4016	16	3-3/8"	0.1770"	12
BL4017	17	3-3/8"	0.1730"	12
BL4018	18	3-1/4"	0.1695"	12
BL4019	19	3-1/4"	0.1660"	12
BL4020	20	3-1/4"	0.1610"	12
BL4021	21	3-1/4"	0.1590"	12
BL4022	22	3-1/8"	0.1570"	12
BL4023	23	3-1/8"	0.1540"	12
BL4024	24	3-1/8"	0.1520"	12
BL4025	25	3"	0.1495"	12
BL4026	26	3"	0.1470"	12
BL4027	27	3"	0.1440"	12
BL4028	28	2-7/8"	0.1405"	12
BL4029	29	2-7/8"	0.1360"	12
BL4030	30	2-3/4"	0.1285"	12
BL4031	31	2-3/4"	0.1200"	12
BL4032	32	2-3/4"	0.1160"	12
BL4033	33	2-5/8"	0.1130"	12
BL4034	34	2-5/8"	0.1110"	12
BL4035	35	2-5/8"	0.1100"	12
BL4036	36	2-1/2"	0.1065"	12
BL4037	37	2-1/2"	0.1040"	12
BL4038	38	2-1/2"	0.1015"	12
BL4039	39	2-3/8"	0.0995"	12
BL4040	40	2-3/8"	0.0980"	12
BL4041	41	2-3/8"	0.0960"	12
BL4042	42	2-1/4"	0.0935"	12
BL4043	43	2-1/4"	0.0890"	12
BL4044	44	2-1/8"	0.0860"	12
BL4045	45	2-1/8"	0.0820"	12
BL4046	46	2-1/8"	0.0810"	12
BL4047	47	2"	0.0785"	12
BL4048	48	2"	0.0760"	12
BL4049	49	2"	0.0730"	12
BL4050	50	2"	0.0700"	12
BL4051	51	2"	0.0670"	12
BL4052	52	1-7/8"	0.0635"	12
BL4053	53	1-7/8"	0.0595"	12
BL4054	54	1-7/8"	0.0550"	12
BL4055	55	1-7/8"	0.0520"	12
BL4056	56	1-3/4"	0.0465"	12
BL4057	57	1-3/4"	0.0430"	12
BL4058	58	1-5/8"	0.0420"	12
BL4059	59	1-5/8"	0.0410"	12
BL4060	60	1-5/8"	0.0400"	12



## Fractional Stubby Length Black Oxide Drill Bits (Bulk)

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL3135	1/8"	1-7/8"	1/8"	12
BL3139	3/16"	2-3/16"	3/16"	12
BL3143	1/4"	2-1/2"	1/4"	12



## Letter Size Black Oxide Drill Bits (Bulk)

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL4201	A	3-7/8"	0.2340"	12
BL4202	B	4"	0.2380"	12
BL4203	C	4"	0.2420"	12
BL4204	D	4"	0.2460"	12
BL4205	E	4"	0.2500"	12
BL4206	F	4-1/8"	0.2570"	12
BL4207	G	4-1/8"	0.2610"	6
BL4208	H	4-1/8"	0.2660"	6
BL4209	I	4-1/8"	0.2720"	6
BL4210	J	4-1/8"	0.2770"	6
BL4211	K	4-1/4"	0.2810"	6
BL4212	L	4-1/4"	0.2900"	6
BL4213	M	4-3/8"	0.2950"	6
BL4214	N	4-3/8"	0.3020"	6
BL4215	O	4-1/2"	0.3160"	6
BL4216	P	4-5/8"	0.3230"	6
BL4217	Q	4-3/4"	0.3320"	6
BL4218	R	4-3/4"	0.3390"	6
BL4219	S	4-7/8"	0.3480"	6
BL4220	T	4-7/8"	0.3580"	6
BL4221	U	5"	0.3680"	6
BL4222	V	5"	0.3770"	6
BL4223	W	5-1/8"	0.3860"	6
BL4224	X	5-1/8"	0.3970"	6
BL4225	Y	5-1/4"	0.4040"	6
BL4226	Z	5-1/4"	0.4130"	6




## Fractional Double-end Black Oxide Drill Bits (Bulk)

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL6134	7/64"	1-15/16"	7/64"	12
BL6135	1/8"	2-1/8"	1/8"	12
BL6136	9/64"	2-5/32"	9/64"	12
BL6137	5/32"	2-5/32"	5/32"	12
BL6139	3/16"	2-5/16"	3/16"	12
BL6141	7/32"	2-5/16"	7/32"	12
BL6143	1/4"	2-5/16"	1/4"	12



## Wire Gauge Double-end Black Oxide Drill Bits (Bulk)

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL6011	11	2-5/16"	0.1910"	12
BL6020	20	2-5/32"	0.1610"	12
BL6030	30	2-1/8"	0.1285"	12

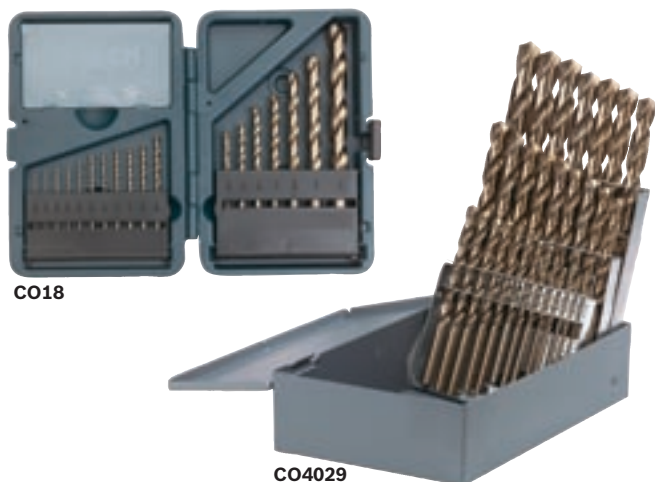

## Cobalt Drill Bits

### Cobalt Drill Bit Sets

Bosch cobalt drill bits offer the best heat resistance and rigid thick web design for drilling in extremely hard and abrasive materials such as treated stainless steel (precipitation-hardened), cast iron and titanium.

- A tough cobalt alloy delivers heat resistance up to 1100° Fahrenheit allowing the bit to perform for extended periods of time in the most abrasive materials without failing due to the high heat levels. Overall bit hardness of 66-68 HRC from the cobalt formulation gives the ability to penetrate exceptionally tough materials
- 135° split point starts on contact with no walking or skating and no center punch is required

Item #	# of Pieces	Description
CO10	10	10 pc. set in blow-molded plastic case
CO4013	13	Fractional jobber length 1/16" to 1/4" by 64ths in metal index
CO18	18	18 pc. set in blow-molded plastic case
CO4029	29	Fractional jobber length 1/16" to 1/2" by 64ths in metal index

### Reversible Geared Three-Jaw Chuck Kits


- Kits include: chuck key; metric and standard mounting screws – coated and hardened and complete instructions.



Item #	Chuck Size#	Rating	Bit Capacity	Mount	Application
CKK002	3/8"	Heavy	1/16" - 3/8"	3/8" - 24	Fits all brands of cordless and corded drills.
CKK003	3/8"	Extra-Heavy	1/16" - 3/8"	3/8" - 24	Fits all brands of cordless and corded drills and hammer drills.
CKK004	3/8"	Heavy	1/16" - 3/8"	1/2" - 20	
CKK005	1/2"	Heavy	5/64" - 1/2"	1/2" - 20	

Item #	Diameter	Overall Length	Shank Diameter	Quantity
<b>Carded Items</b>				
CO2131	1/16"	1-7/8"	1/16"	1
CO2132	5/64"	2"	5/64"	1
CO2133	3/32"	2-1/4"	3/32"	1
CO2134	7/64"	2-5/8"	7/64"	1
CO2135	1/8"	2-3/4"	1/8"	1
CO2136	9/64"	2-7/8"	9/64"	1
CO2137	5/32"	3-1/8"	5/32"	1
CO2138	11/64"	3-1/4"	11/64"	1
CO2139	3/16"	3-1/2"	3/16"	1
CO2140	13/64"	3-5/8"	13/64"	1
CO2141	7/32"	3-3/4"	7/32"	1
CO2142	15/64"	3-7/8"	15/64"	1
CO2143	1/4"	4"	1/4"	1
CO2144	17/64"	4-1/8"	17/64"	1
CO2145	9/32"	4-1/4"	9/32"	1
CO2146	19/64"	4-3/8"	19/64"	1
CO2147	5/16"	4-1/2"	5/16"	1
CO2148	21/64"	4-5/8"	21/64"	1
CO2149	11/32"	4-3/4"	11/32"	1
CO2150	23/64"	4-7/8"	23/64"	1
CO2151	3/8"	5"	3/8"	1
CO2152	25/64"	5-1/8"	25/64"	1
CO2153	13/32"	5-1/4"	13/32"	1
CO2154	27/64"	5-3/8"	27/64"	1
CO2155	7/16"	5-1/2"	7/16"	1
CO2156	29/64"	5-5/8"	29/64"	1
CO2157	15/32"	5-3/4"	15/32"	1
CO2158	31/64"	5-7/8"	31/64"	1
CO2159	1/2"	6"	1/2"	1
<b>Bulk Items</b>				
CO4128	1/64"	3/4"	1/64"	12
CO4129	1/32"	1-3/8"	1/32"	12
CO4130	3/64"	1-3/4"	3/64"	12
CO4131	1/16"	1-7/8"	1/16"	12
CO4132	5/64"	2"	5/64"	12
CO4133	3/32"	2-1/4"	3/32"	12
CO4134	7/64"	2-5/8"	7/64"	12
CO4135	1/8"	2-3/4"	1/8"	12
CO4136	9/64"	2-7/8"	9/64"	12
CO4137	5/32"	3-1/8"	5/32"	12
CO4138	11/64"	3-1/4"	11/64"	12
CO4139	3/16"	3-1/2"	3/16"	12
CO4140	13/64"	3-5/8"	13/64"	12
CO4141	7/32"	3-3/4"	7/32"	12
CO4142	15/64"	3-7/8"	15/64"	12
CO4143	1/4"	4"	1/4"	12
CO4144	17/64"	4-1/8"	17/64"	6
CO4145	9/32"	4-1/4"	9/32"	6
CO4146	19/64"	4-3/8"	19/64"	6
CO4147	5/16"	4-1/2"	5/16"	6
CO4148	21/64"	4-5/8"	21/64"	6
CO4149	11/32"	4-3/4"	11/32"	6
CO4150	23/64"	4-7/8"	23/64"	6
CO4151	3/8"	5"	3/8"	6
CO4152	25/64"	5-1/8"	25/64"	6
CO4153	13/32"	5-1/4"	13/32"	6
CO4154	27/64"	5-3/8"	27/64"	6
CO4155	7/16"	5-1/2"	7/16"	6
CO4156	29/64"	5-5/8"	29/64"	6
CO4157	15/32"	5-3/4"	15/32"	6
CO4158	31/64"	5-7/8"	31/64"	6
CO4159	1/2"	6"	1/2"	6

## Specialty Drill Bits

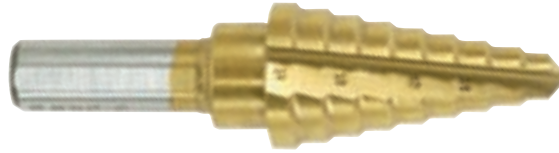

### Titanium Coated Step Drills

Bosch step drills offer the ability to drill up to thirteen holes with just one drill bit. Cuts are clean and accurate in even the toughest materials including sheet metal, ducts, steel, copper, brass, aluminum, plastic, plexiglass, wood, veneers, vinyl siding, plasterboard, PVC, stainless steel and cast iron up to 1/8" thick. Ideal for electrical, plumbing and HVAC contractors with jobs like running conduit, drawbolt holes, electrical knockouts, faucet installations, auto body work, running freon lines, edge boring steel and hollow doors.

- Super hard titanium coating lasts up to 6 times longer than high speed steel
- Self starting points start on contact
- Balanced double flute design eliminates chatter and vibration

Item #	Diameter Inches (Increments)	Step Depth	Number of Hole Sizes	Shank Diameter	Application	Point Type
SDT1	1/8" - 1/2" (1/32")	1/8"	13	1/4"	All common drilling needs	Self-starting
SDT6	3/16" - 1/2" (1/16")	3/8"	6	1/4"	All common drilling needs	Self-starting
SDT2	3/16" - 7/8" (1/16")	1/8"	12	3/8"	All common drilling needs	Self-starting
SDT3	1/4" - 3/4" (1/16")	1/8"	9	3/8"	Ideal for cutting medium size holes	Self-starting
SDT4	1/4" - 7/8" - 1-1/8"	5/32"	3	3/8"	For 1/2" and 3/4" conduit	Self-starting
SDT10	1/4" - 1-3/8" (1/8")	1/8"	10	3/8"	For 1" conduit and tubing	Self-starting
SDT12	3/8"	N/A	1	1/4"	Knockout	Self-starting
SDT8	1/2"	N/A	1	1/4"	Knockout	Self-starting
SDT7	9/16" - 1" (1/16")	1/8"	8	3/8"	Companion bit to SDT1 for diameter range 1/8" to 1"	For hole enlarging
SDT9	13/16" - 1-3/8" (1/16")	1/8"	10	1/2"	For 1" conduit and tubing	For hole enlarging
SDT5	7/8"	N/A	1	3/8"	Drill perfect size holes for conduit. Ideal for drawbolt and miniature pilot light holes	Self-starting
SDT11	1-1/8"	N/A	1	1/2"	Knockout	Self-starting



### High Speed Steel Step Drills

Bosch step drills offer the ability to drill up to thirteen holes with just one drill bit. Cuts are clean and accurate in even the toughest materials including sheet metal, ducts, steel, copper, brass, aluminum, plastic, plexiglass, wood, veneers, vinyl siding, plasterboard, PVC, stainless steel and cast iron up to 1/8" thick. Ideal for electrical, plumbing and HVAC contractors with jobs like running conduit, drawbolt holes, electrical knockouts, faucet installations, auto body work, running freon lines, edge boring steel and hollow doors.

- Self starting points start on contact
- Balanced double flute design eliminates chatter and vibration

Item #	Diameter Inches (Increments)	Step Depth	Number of Hole Sizes	Shank Diameter	Application	Point Type
SDH1	1/8" - 1/2" (1/32")	1/8"	13	1/4"	All common drilling needs	Self-starting
SDH6	3/16" - 1/2" (1/16")	3/8"	6	1/4"	All common drilling needs	Self-starting
SDH2	3/16" - 7/8" (1/16")	1/8"	12	3/8"	All common drilling needs	Self-starting
SDH3	1/4" - 3/4" (1/16")	1/8"	9	3/8"	Ideal for cutting medium size holes	Self-starting
SDH4	1/4" - 7/8" - 1-1/8"	5/32"	3	3/8"	For 1/2" and 3/4" conduit	Self-starting
SDH10	1/4" - 1-3/8" (1/8")	1/8"	10	3/8"	For 1" conduit and tubing	Self-starting
SDH12	3/8"	N/A	1	1/4"	Knockout	Self-starting
SDH8	1/2"	N/A	1	1/4"	Knockout	Self-starting
SDH7	9/16" - 1" (1/16")	1/8"	8	3/8"	Companion bit to SDH1 for diameter range 1/8" to 1"	For hole enlarging
SDH9	13/16" - 1-3/8" (1/16")	1/8"	10	1/2"	For 1" conduit and tubing	For hole enlarging
SDH5	7/8"	N/A	1	3/8"	Drill perfect size holes for conduit. Ideal for drawbolt and miniature pilot light holes	Self-starting
SDH11	1-1/8"	N/A	1	1/2"	Knockout	Self-starting

NOTE: Drill bits (or extension + drill bit) in excess of 8" should never exceed 600 RPM.



## Step Drill Bits

### Titanium Coated



**Super Hard Titanium Coating**  
Lasts up to 6X longer than High Speed Steel.

### High Speed Steel



**Self Starting Point**  
Starts on contact.

**Balanced Double Flute**  
Eliminates chatter and vibration.

**Trailing Flute**  
Automatically deburrs holes.

**Resharpenable Cutting Edge**  
Longer tool life.



## Step Drill Sets

Item #	Description
SDT30	3 pc. titanium step drill set includes SDT1, SDT3 and SDT6
SDH30	3 pc. high speed steel step drill set includes SDH1, SDH3 and SDH6

## BOSCH Countersinks


The Bosch line of countersinks are great for deburring and chamfering openings to pre-drilled holes. Great for electrical, plumbing, and HVAC contractors. Bosch countersinks cut most materials cleanly and accurately. With standard high speed steel and super hard titanium coated bits, these countersinks perform great in even the toughest materials.

### Materials:

The Bosch line of countersinks cut great in these materials: iron, steel, soft metal, plastic and wood.

### Applications:

The Bosch line of countersinks work great for these jobs: deburring holes and countersinking holes for flush or countersunk screw heads.



### Titanium Coated Countersinks

Item #	Diameter	Chamfer Angle	Shank Diameter	Number of Flutes
CST1	1/2"	82°	1/4"	5
CST2	5/8"	82°	1/4"	5
CST3	3/4"	82°	1/4"	5



### High Speed Steel Countersinks

Item #	Diameter	Chamfer Angle	Shank Diameter	Number of Flutes
CSH1	1/2"	82°	1/4"	5
CSH2	5/8"	82°	1/4"	5
CSH3	3/4"	82°	1/4"	5

NOTE: Drill bits (or extension + drill bit) in excess of 8" should never exceed 600 RPM.



## The Bosch Quick Change Universal Hole Saw System lets you swap any saw in seconds.






### Easy Quick Change and Simple Plug Removal.

Now you can work faster and smarter - using our patented Quick Change Universal Hole Saw System. Its revolutionary design and our universal mandrel work with any brand of tool or hole saw to let you change saws in seconds.

And now, with an expanded family of Bosch hole saws - including new carbide multi-material and sheet metal saws - upgrading to Bosch quality makes more sense than ever.

**One Completely Functional Family. This Changes Everything. In Seconds!**


### Product Comparison

Materials	Bi-Metal	Sheet Metal	Carbide	Application tips
				
Natural wood, hardwood	●		●	
Plywood, woodcore plywood	●		●	
Chipboard, Raw, veneered, laminated	●		●	
Laminate			●	
Fiber-reinforced composites	●		●	
Sandwich materials	●		●	
Plastics	●		●	
Acrylic glass/polycarbonate			●	Use coolant
Cementboard			●	
Lightweight concrete			●	
Masonry			●	
Vertically perforated brick			●	Reduce contact pressure
Roofing tiles			●	Not concrete roofing tiles
Thin metal plates (INOX, steel, aluminum, copper, brass)	●	●		Use cutting oil



### Key Features

**Progressive tooth design and 10° cutting angle for high performance.**  
**Bimetal construction and 8% cobalt alloy for extreme resilience and long life.**

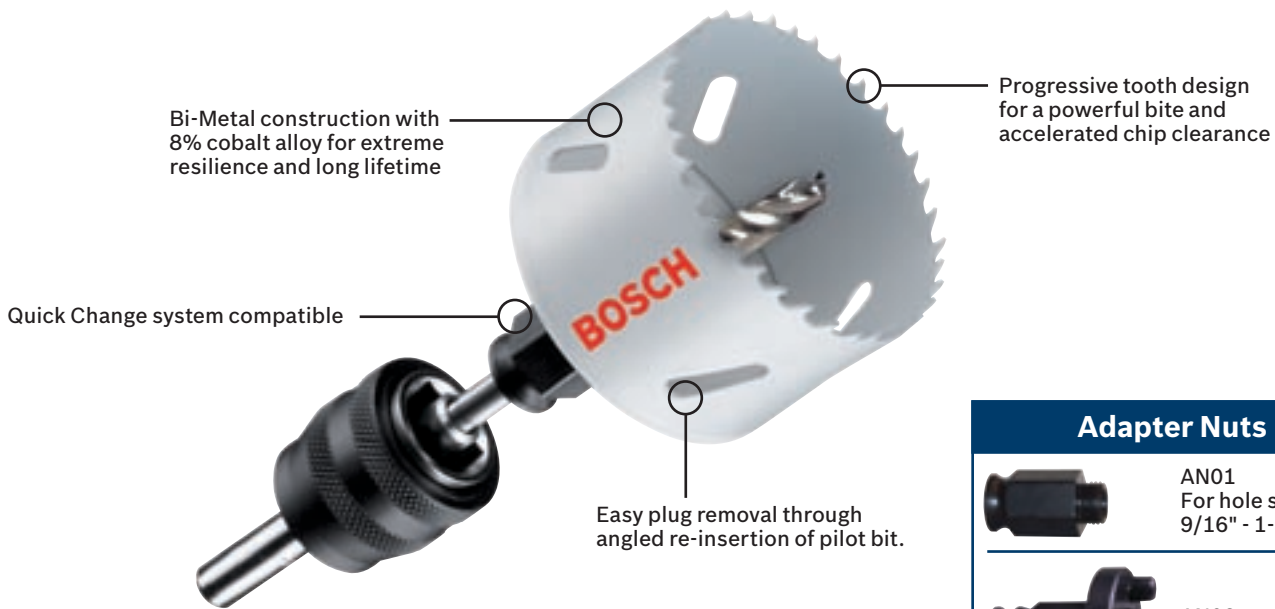

### Adapter Nuts



**AN01**  
For hole saw sizes  
9/16" - 1-3/16"



**AN02**  
For hole saw sizes  
1-1/4" - 6"

### Bi-Metal Product Listing

Item #	Diameter	Adapter	Quantity
HB062	9/16"	AN01	1
HB063	5/8"	AN01	1
HB069	11/16"	AN01	1
HB075	3/4"	AN01	1
HB081	13/16"	AN01	1
HB087	7/8"	AN01	1
HB094	15/16"	AN01	1
HB100	1"	AN01	1
HB106	1-1/16"	AN01	1
HB112	1-1/8"	AN01	1
HB119	1-3/16"	AN01	1
HB125	1-1/4"	AN02	1
HB131	1-5/16"	AN02	1
HB136	1-3/8"	AN02	1
HB144	1-7/16"	AN02	1
HB150	1-1/2"	AN02	1

Item #	Diameter	Adapter	Quantity
HB156	1-9/16"	AN02	1
HB163	1-5/8"	AN02	1
HB169	1-11/16"	AN02	1
HB175	1-3/4"	AN02	1
HB181	1-13/16"	AN02	1
HB187	1-7/8"	AN02	1
HB200	2"	AN02	1
HB206	2-1/16"	AN02	1
HB212	2-1/8"	AN02	1
HB225	2-1/4"	AN02	1
HB231	2-5/16"	AN02	1
HB236	2-3/8"	AN02	1
HB250	2-1/2"	AN02	1
HB256	2-9/16"	AN02	1
HB263	2-5/8"	AN02	1
HB269	2-11/16"	AN02	1

# Bi-Metal Hole Saws

Item #	Diameter	Adapter	Quantity
HB275	2-3/4"	AN02	1
HB287	2-7/8"	AN02	1
HB300	3"	AN02	1
HB312	3-1/8"	AN02	1
HB325	3-1/4"	AN02	1
HB338	3-3/8"	AN02	1
HB350	3-1/2"	AN02	1
HB363	3-5/8"	AN02	1
HB375	3-3/4"	AN02	1
HB387	3-7/8"	AN02	1
HB400	4"	AN02	1
HB412	4-1/8"	AN02	1
HB425	4-1/4"	AN02	1

Item #	Diameter	Adapter	Quantity
HB436	4 3/8"	AN02	1
HB450	4-1/2"	AN02	1
HB475	4-3/4"	AN02	1
HB500	5"	AN02	1
HB550	5-1/2"	AN02	1
HB575	5-3/4"	AN02	1
HB600	6"	AN02	1
HB19EL	19 Pc. Electrician Set	—	1
HB25M	25 Pc. Master Set	—	1
HB17PL	17 Pc. Plumber Set	—	1
HBUSKIT	Universal Quick Change Hole Saw Kit	—	1
PCPD4	4" Cobalt Pilot drill	—	1
HB85PB	3-3/8" HSS Pilot drill	—	1

**HB19EL**  
19 Pc. Electrician Set



**HB25M**  
25 Pc. Master Set



**HB17PL**  
17 Pc. Plumber Set




**HBUSKIT**  
Universal Quick  
Change Hole Saw Kit






## Enlarge existing holes quickly, easily and accurately.

Perfect for: • Door locks • Retro-fitting conduit • Correcting errors

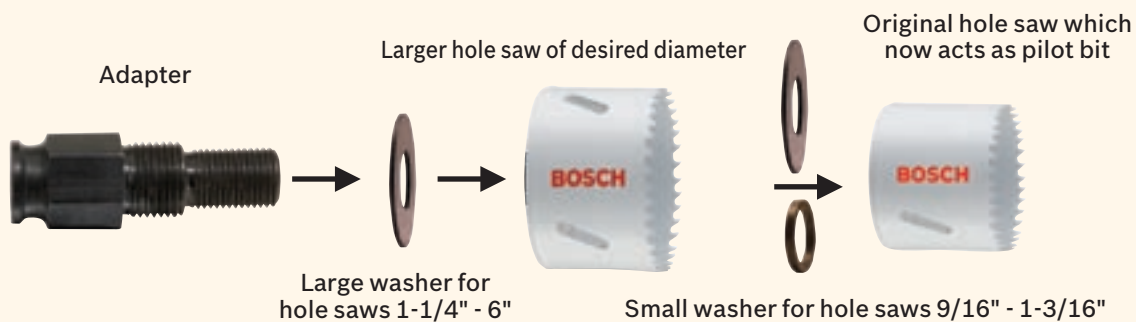

### Step 1

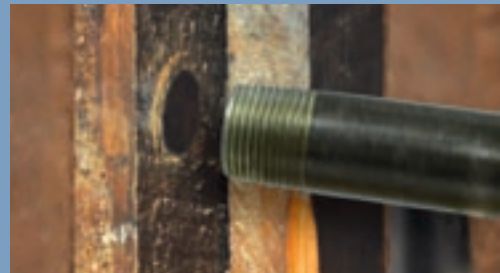

If the hole drilled is too small

### Step 2



Assemble the hole enlarger

### Step 3




- Attach saw with correct hole diameter
- Attach hole saw that matches original hole saw diameter

### Step 4



Align saws and re-cut hole

### Step 5

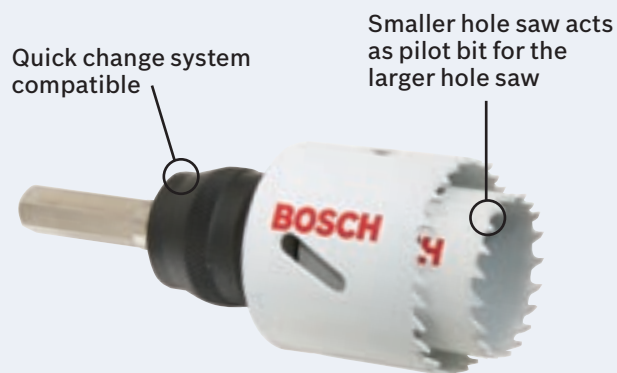



1-1/4" - 6"  
HSS Large  
Pin Mandrel

**HSBAL**  
2 610 949 279



9/16" - 6"  
HSS Medium  
Mandrel

**HSBAM**  
2 610 949 278



## Universal Quick Change Mandrel Kit

Set includes:

(1) 3/8" mandrel; Small adapter for hole saw sizes 9/16" - 1 3/16"; large adapter for hole saw sizes 1/4" - 6".

Also available: PCM12AN 2 610 949 649;

Set includes:

(1) 1/2" mandrel; Small adapter for hole saw sizes 9/16" - 1 3/16"; large adapter for hole saw sizes 1/4" - 6".

**PCM38AN**  
2 610 949 648



1/2" Mandrel

**PCM12**  
2 610 945 438



3/8" Mandrel

**PCM38**  
2 610 945 437



## Quick Change Conversion Kit

Set includes:

(2) Small adapters for hole saw sizes 9/16" - 1 3/16"; (4) large adapters for hole saw sizes 1/4" - 6"

**CK2**  
2 610 949 750



SDS Mandrel

**PCMSDSPL**  
2 610 945 439



## Hole Enlarger Kit

Set Includes:

(2) hole saws 1", 1 1/2", 2 1/8" and 2 1/2";

(1) 3/8" mandrel, (1) pilot bit,

(1) quick-change adapter: For hole saw sizes 1/4" - 6";

(1) quick-change adapter: For hole saw sizes 9/16" - 1 3/16"

**HE1**  
2 608 678 415






## Key Features

Special vario tooth strip drills quickly and cleanly in 16 gauge or thinner material. Can be used to drill aluminum, copper, brass, bronze or steel.

Depth Stopper prevents breakthrough which protects the work surface

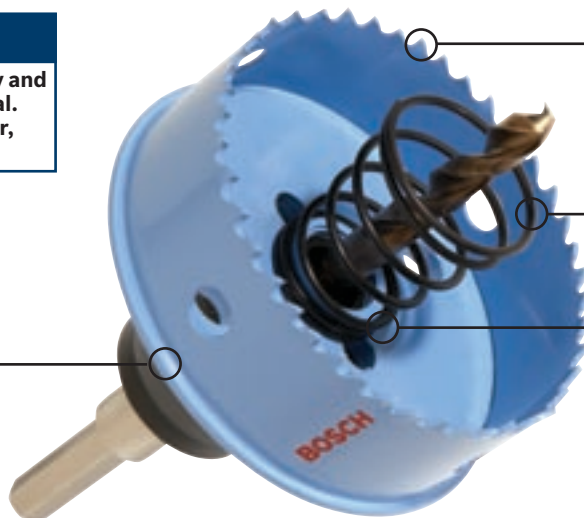

Variable Tooth Pitch optimized for fast precise cutting in sheet metal

Spring for automatic disc ejection for faster cutting progress

Extended reinforced threads for longer life

## Sheet Metal Product Listing

Item #	Diameter	Adapter	Quantity
HSM062	9/16"	AN01	1
HSM063	5/8"	AN01	1
HSM075	3/4"	AN01	1
HSM087	7/8"	AN01	1
HSM100	1"	AN01	1
HSM112	1-1/8"	AN01	1
HSM125	1-1/4"	AN02	1
HSM136	1-3/8"	AN02	1
HSM150	1-1/2"	AN02	1
HSM175	1-3/4"	AN02	1
HSM187	1-7/8"	AN02	1
HSM200	2"	AN02	1
HSM212	2-1/8"	AN02	1
HSM225	2-1/4"	AN02	1
HSM250	2-1/2"	AN02	1
HSM256	2-9/16"	AN02	1

Item #	Diameter	Adapter	Quantity
HSM263	2-5/8"	AN02	1
HSM275	2-3/4"	AN02	1
HSM300	3"	AN02	1
HSM312	3 1/8"	AN02	1
HSM325	3-1/4"	AN02	1
HSM350	3-1/2"	AN02	1
HSM363	3-5/8"	AN02	1
HSM375	3-3/4"	AN02	1
HSM400	4"	AN02	1
HSM412	4-1/8"	AN02	1
HSM450	4-1/2"	AN02	1
HSM500	5"	AN02	1
HSM550	5-1/2"	AN02	1
HSM600	6"	AN02	1
HSM80PB	Cobalt Pilot bit 3-1/8"	—	1
HSM15PCE	15 Pc. Set Sht Mtl HS	—	1
HSM23PCM	23 Pc. Set Sht Mtl HS	—	1

**HSM15PCE**  
15 Pc. Sht Mtl HS



**HSM23PCM**  
23 Pc. Sht Mtl HS



# Carbide Hole Saws

## Key Features

A multi-material hole saw.  
Drills through solid wood, laminate, plywood, chipboard, cement board, roofing tiles, aerated concrete, plastics or fiber-reinforced composites.

Quick Change Adapter only for use with Quick Change system. Allows for fast changes between hole saw sizes and easy plug removal



## Carbide Product Listing

Item #	Diameter	Quantity
HTC100	1"	1
HTC118	1-3/16"	1
HTC137	1-3/8"	1
HTC156	1-9/16"	1
HTC175	1-3/4"	1
HTC187	1-7/8"	1
HTC212	2-1/8"	1
HTC225	2-1/4"	1
HTC237	2-3/8"	1
HTC256	2-9/16"	1
HTC268	2-11/16"	1

Item #	Diameter	Quantity
HTC275	2-3/4"	1
HTC300	3"	1
HTC312	3 1/8"	1
HTC325	3-1/4"	1
HTC350	3-1/2"	1
HTC375	3-3/4"	1
HTC400	4"	1
HTC412	4" 1/8"	1
HTCTCP	TC pilot drill bit	1
HTC8PC	8 Pc. Set - 1", 1-1/8", 1-3/8", 1-3/4", 2-1/4", 1 pilot bit and 1-3/8" mandrel	1
HTC5HPC	5 Pc. Set	1



## Phillips Screwdriver Bits



Phillips

Item #	Description	Point	Length	Quantity
<b>Carded Items</b>				
<b>Insert Bits</b>				
P0102	Phillips #0	P0	1"	5
P1102	#1 Phillips, (2 pk)	P1	1"	N/A
P1102G	Phillips #1	P1	1"	5
P1102GX	Phillips #1 Insert Bit	P1	1"	5
P1102M	Phillips #1 Gold	P1	1"	5
P1R102	Phillips 1R	P1R	1"	5
P2102	#2 Phillips, (2 pk)	P2	1"	N/A
P2102M	Phillips P2 Insert Bit (2 pk)	P2	1"	5
P3102	#3 Phillips, (2 pk)	P3	1"	N/A
P2102G	Phillips #2	P2	1"	5
P2516102	Phillips #2	P2	1"	5
P2R102	Phillips #2R	P2R	1"	5
P2R102M	Phillips #P2R Gold	P2R	1"	5
P3102G	Phillips #3	P3	1"	5
P3102R	Phillips #3 RIB	P3	1"	5
<b>Power Bits</b>				
P1201	Phillips #1 Gray	P1	1-15/16"	5
CCP1201	#1 Phillips, (1 pk)	P1	2"	1
CCP1301	#1 Phillips, (1 pk)	P1	3-1/2"	1
P2D23501	Phillips P2D Deck	P2	3-1/2"	5
P2401	Phillips #2 Gray	P2	4"	5
CCP2201	#2 Phillips, (1 pk)	P2	2"	1
CCP2205	#2 Phillips, (5 pk)	P2	2"	1
CCP3201	#3 Phillips, (1 pk)	P2	2"	1
CCP2A02	#2 Phillips (2 pk)	P2	2" and 3-1/2"	1
CCP2301	#2 Phillips, (1 pk)	P2	3-1/2"	1
CCP2601	#2 Phillips, (1 pk)	P2	6"	1
P3201	Phillips #3 Gray	P3	1-15/16"	5
P3D201	Phillips P3D Deck Gray	P3	1-15/16"	5
<b>Bulk Items</b>				
<b>Insert Bits</b>				
27019	#0 Phillips Insert Bit	P0	1"	1
27020	#1 Phillips Insert Bit	P1	1"	1
27021	#2 Phillips Insert Bit	P2	1"	1
27022	#3 Phillips Insert Bit	P3	1"	1
27023	#2 Phillips Insert Bit	P2	1-1/2"	1
27024	#2 Phillips Insert Bit	P2	2"	1
27025	#2 Phillips Insert Bit	P2	2-1/2"	1
37514	#2 Phillips Insert Bit - Reduced Diameter	P2R	2"	1
27205	#1 Phillips Insert Bit	P1	1-1/4"	1
27206	#2 Phillips Insert Bit	P2	1-1/4"	1
27207	#3 Phillips Insert Bit	P3	1-1/4"	1
27208	#4 Phillips Insert Bit	P4	1-1/4"	1
27035	#1 Phillips Insert Bit - Reduced Diameter	P1R	1"	1
27036	#2 Phillips Insert Bit - Reduced Diameter	P2R	1"	1
<b>Power Bits</b>				
27360	#1 Phillips Power Bit	P1	1-15/16"	1
27361	#2 Phillips Power Bit	P2	1-15/16"	1
27362	#3 Phillips Power Bit	P3	1-15/16"	1
27363	#1 Phillips Power Bit	P1	2-3/4"	1
27364	#2 Phillips Power Bit	P2	2-3/4"	1
27365	#3 Phillips Power Bit	P3	2-3/4"	1
28310	#1 Phillips Power Bit	P1	3"	1
28311	#2 Phillips Power Bit	P2	3"	1
28312	#3 Phillips Power Bit	P3	3"	1
27366	#1 Phillips Power Bit	P1	3-1/2"	1
27367	#2 Phillips Power Bit	P2	3-1/2"	1

## Phillips Screwdriver Bits (Continued)



Phillips

Item #	Description	Point	Length	Quantity
<b>Bulk Items</b>				
<b>Power Bits</b>				
27368	#3 Phillips Power Bit	P3	3-1/2"	1
28313	#1 Phillips Power Bit	P1	4"	1
28314	#2 Phillips Power Bit	P2	4"	1
28315	#3 Phillips Power Bit	P3	4"	1
45794	#1 Phillips Power Bit	P1	6"	1
45625	#2 Phillips Power Bit	P2	6"	1
35992	#3 Phillips Power Bit	P3	6"	1

## Square Screwdriver Bits



Square

Item #	Description	Point	Length	Quantity
<b>Carded Items</b>				
<b>Insert Bits</b>				
SQ0102	Square #0	R0	1"	5
SQ1102	Square #1 Square Recess, (2 pk)	R1	1"	5
SQ1102M	Square #1 GOLD	R1	1"	5
SQ2102	Square #2 Square Recess, (2 pk)	R2	1"	5
SQ3102	Square #3 Square Recess, (2 pk)	R3	1"	5
<b>Power Bits</b>				
SQ1201M	Square #1 Gold	R1	1-15/16"	5
CCSQ1201	Square Recess #1, (1 pk)	R1	2"	5
SQ12701	Square #1 Gray	R1	2-3/4"	5
SQ1301	Square #1 Gray	R1	3"	5
SQ13501	Square #1 Gray	R1	3-1/2"	5
SQR2D201	Square #R2D Gray Rib	R2	1-15/16"	5
CCSQ2201	Square #2 Recess, (1 pk)	R2	2"	5
CCSQ2205	Square #2 Recess, (5 pk)	R2	2"	3
SQ22701	Square #2 Gray	R2	2-3/4"	5
SQ2301	Square #2 Gray	R2	3"	5
SQ2401	Square #2 Gray	R2	4"	5
CCSQ2601	Square #2 Recess, (1 pk)	R2	6"	1
SQ32701	Square #3 Gray	R3	2-3/4"	5
CCSQ3201	Square #3 Recess, (1 pk)	R3	2"	5
SQ3301	Square #3 Gray	R3	3"	5
SQ33501	Square #3 Gray	R3	3-1/2"	5
SQ3601	Square #3 Gray	R3	6"	5
<b>Bulk Items</b>				
<b>Insert Bits</b>				
38509	#0 Square Recess Insert Bit	R0	1"	1
29049	#1 Square Recess Insert Bit	R1	1"	1
29050	#2 Square Recess Insert Bit	R2	1"	1
29051	#3 Square Recess Insert Bit	R3	1"	1
<b>Power Bits</b>				
29052	#1 Square Recess Power Bit	R1	1-15/16"	1
29053	#2 Square Recess Power Bit	R2	1-15/16"	1
29054	#3 Square Recess Power Bit	R3	1-15/16"	1
29055	#1 Square Recess Power Bit	R1	2-3/4"	1
29056	#2 Square Recess Power Bit	R2	2-3/4"	1
29057	#3 Square Recess Power Bit	R3	2-3/4"	1
29058	#1 Square Recess Power Bit	R1	3"	1
29059	#2 Square Recess Power Bit	R2	3"	1
29060	#3 Square Recess Power Bit	R3	3"	1
44136	#1 Square Recess Power Bit	R1	4"	1
39953	#2 Square Recess Power Bit	R2	4"	1
44138	#3 Square Recess Power Bit	R3	4"	1
39957	#1 Square Recess Power Bit	R1	6"	1
39959	#2 Square Recess Power Bit	R2	6"	1
39961	#3 Square Recess Power Bit	R3	6"	1

# Slotted/Torx Screwdriver Bits



Slotted

## Slotted Screwdriver Bits

Item #	Description	Point	Length	Quantity
<b>Carded Items</b>				
<b>Insert Bits</b>				
SL0102	0-1 Slotted	0-1	1"	5
SL1102	1-2 Slotted	1-2	1"	5
SL2102	2-3 Slotted	2-3	1"	5
SL3102	3-4 Slotted	3-4	1"	5
SL4102	4-5 Slotted	4-5	1"	5
SL5102	5-6 Slotted	5-6	1"	5
SL6102	6-8 Slotted	6-8	1"	5
SL8102	8-10 Slotted	8-10	1"	5
SL10102	10-12 Slotted	10-12	1"	5
<b>Power Bits</b>				
SL56201	5-6 Slotted	5-6	1-15/16"	5
SL8103501	8-10 Slotted	8-10	3-1/2"	5
SL1012201	10-12 Slotted	10-12	1-15/16"	5
SL1214201	12-14 Slotted	12-14	1-15/16"	5
<b>Bulk Items</b>				
<b>Insert Bits</b>				
41178	3-4 Slotted Insert Bit	3-4	1"	1
39534	4-5 Slotted Insert Bit	4-5	1"	1
39536	6-8 Slotted Insert Bit	6-8	1"	1
39537	8-10 Slotted Insert Bit	8-10	1"	1
39538	10-12 Slotted Insert Bit	10-12	1"	1
39539	12-14 Slotted Insert Bit	12-14	1"	1
27001	6-8 Slotted Insert Bit	6-8	1-1/2"	1
27190	4-5 Slotted Insert Bit Shank Diameter 5/16"	4-5	1-1/2"	1
27191	6-8 Slotted Insert Bit Shank Diameter 5/16"	6-8	1-1/2"	1
27192	8-10 Slotted Insert Bit Shank Diameter 5/16"	8-10	1-1/2"	1
27193	10-12 Slotted Insert Bit Shank Diameter 5/16"	10-12	1-1/2"	1
27194	12-14 Slotted Insert Bit Shank Diameter 5/16"	12-14	1-1/2"	1
27195	14-16 Slotted Insert Bit Shank Diameter 5/16"	14-16	1-1/2"	1
<b>Power Bits</b>				
27462	3-4 Slotted Power Bit	3-4	1-15/16"	1
27463	4-5 Slotted Power Bit	4-5	1-15/16"	1
27464	5-6 Slotted Power Bit	5-6	1-15/16"	1
27465	6-8 Slotted Power Bit	6-8	1-15/16"	1
27466	8-10 Slotted Power Bit	8-10	1-15/16"	1
27467	10-12 Slotted Power Bit	10-12	1-15/16"	1
27468	12-14 Slotted Power Bit	12-14	1-15/16"	1
28296	8-10 Slotted Power Bit	8-10	3"	1
28297	10-12 Slotted Power Bit	10-12	3"	1
27481	4-5 Slotted Power Bit	4-5	3-1/2"	1
27483	6-8 Slotted Power Bit	6-8	3-1/2"	1
27484	8-10 Slotted Power Bit	8-10	3-1/2"	1
27485	10-12 Slotted Power Bit	10-12	3-1/2"	1
27486	12-14 Slotted Power Bit	12-14	3-1/2"	1
27501	6-8 Slotted Power Bit x	6-8	6"	1
27502	8-10 Slotted Power Bit	8-10	6"	1
27504	12-14 Slotted Power Bit	12-14	6"	1



Torx

## Torx Screwdriver Bits

Item #	Description	Point	Length	Quantity
<b>Carded Items</b>				
<b>Insert Bits</b>				
TX6102	Torx T6	T6	1"	5
TX7102	Torx T7	T7	1"	5
TX8102	Torx T8	T8	1"	5
TX9102	Torx T9	T9	1"	5
TX15102M	Torx T15 Gld	T15	1"	2



Torx

## Torx Screwdriver Bits (Continued)

Item #	Description	Point	Length	Quantity
<b>Carded Items</b>				
<b>Insert Bits (2 PK)</b>				
TX2025102	Torx 20 and Torx 25, T20 & T25	T20 & T25	1"	1
TX25102M	TX25102M T25 Torx Insert Bit	T25	1"	5
TX1015102	Torx 10 & Torx 15	Torx	1"	1
TX20102M	TX20102M T20 Torx Insert Bit	T20	1"	1
<b>Power Bits</b>				
TX10201	Torx T10	T10	1-15/16"	5
TX10601	Torx T10	T10	6"	5
TX15201	Torx T15	T15	1-15/16"	5
TX15601	Torx T15	T15	6"	5
TX20201M	Torx T20	T20	1-15/16"	5
TX20601	Torx T20	T20	6"	5
TX25201M	Torx T25	T25	1-15/16"	5
TX27601	Torx T27	T27	6"	5
TX40201	Torx T40	T40	1-15/16"	5
<b>Bulk Items</b>				
<b>Insert Bits</b>				
41211	T6 Insert Bit	T6	1"	1
37151	T7 Insert Bit	T7	1"	1
37153	T8 Insert Bit	T8	1"	1
37155	T9 Insert Bit	T9	1"	1
37157	T10 Insert Bit	T10	1"	1
37159	T15 Insert Bit	T15	1"	1
37161	T20 Insert Bit	T20	1"	1
37163	T25 Insert Bit	T25	1"	1
37165	T27 Insert Bit	T27	1"	1
37167	T30 Insert Bit	T30	1"	1
37169	T40 Insert Bit	T40	1"	1
37171	T30 Insert Bit Shank Diameter 5/16"	T30	1-1/4"	1
37173	T40 Insert Bit Shank Diameter 5/16"	T40	1-1/4"	1
37175	T45 Insert Bit Shank Diameter 5/16"	T45	1-1/4"	1
37177	T50 Insert Bit Shank Diameter 5/16"	T50	1-1/4"	1
38333	T55 Insert Bit Shank Diameter 5/16"	T55	1-1/4"	1
<b>Power Bits</b>				
41751	T6 Power Bit	T6	1-15/16"	1
39931	T7 Power Bit	T7	1-15/16"	1
37713	T8 Power Bit	T8	1-15/16"	1
39933	T9 Power Bit	T9	1-15/16"	1
37715	T10 Power Bit	T10	1-15/16"	1
37717	T15 Power Bit	T15	1-15/16"	1
37719	T20 Power Bit	T20	1-15/16"	1
37721	T25 Power Bit	T25	1-15/16"	1
37723	T27 Power Bit	T27	1-15/16"	1
37725	T30 Power Bit	T30	1-15/16"	1
37727	T40 Power Bit	T40	1-15/16"	1
37729	T8 Power Bit	T8	2-3/4"	1
37731	T10 Power Bit	T10	2-3/4"	1
37733	T15 Power Bit	T15	2-3/4"	1
37735	T20 Power Bit	T20	2-3/4"	1
37737	T25 Power Bit	T25	2-3/4"	1
37739	T27 Power Bit	T27	2-3/4"	1
37741	T30 Power Bit	T30	2-3/4"	1
37743	T40 Power Bit	T40	2-3/4"	1
37745	T8 Power Bit	T8	3-1/2"	1
37747	T10 Power Bit	T10	3-1/2"	1
37749	T15 Power Bit	T15	3-1/2"	1
37751	T20 Power Bit	T20	3-1/2"	1
37753	T25 Power Bit	T25	3-1/2"	1
37755	T27 Power Bit	T27	3-1/2"	1
37757	T30 Power Bit	T30	3-1/2"	1
37759	T40 Power Bit	T40	3-1/2"	1
37763	T10 Power Bit	T10	6"	1
37765	T15 Power Bit	T15	6"	1
37767	T20 Power Bit	T20	6"	1

Torx Screwdriver Bits continued on next page



## Torx Screwdriver Bits (Continued)

Item #	Description	Point	Length	Quantity
<b>Bulk Items</b>				
<b>Power Bits</b>				
37769	T25 Power Bit	T25	6"	1
37771	T27 Power Bit	T27	6"	1
37773	T30 Power Bit	T30	6"	1
37775	T40 Power Bit	T40	6"	1



## Torx Security Screwdriver Bits

Security Torx

Item #	Description	Point	Length	Quantity
<b>Carded Items</b>				
<b>Insert Bits</b>				
TXH10102	T10H Tamper Resistant Torx	T10H	1"	2
TXH15102	T15H Tamper Resistant Torx	T15H	1"	2
TXH20102	T20H Tamper Resistant Torx	T20H	1"	2
TXH25102	T25H Tamper Resistant Torx	T25H	1"	2
TXH27102	T27H Tamper Resistant Torx	T27H	1"	2
TXH30102	T30H Tamper Resistant Torx	T30H	1"	2
TXH40102	T40H Tamper Resistant Torx	T40H	1"	2
<b>Bulk Items</b>				
<b>Insert Bits</b>				
38340	T9-TR Insert Bit	T9H	1"	1
38342	T10-TR Insert Bit	T10H	1"	1
38344	T15-TR Insert Bit	T15H	1"	1
38346	T20-TR Insert Bit	T20H	1"	1
38348	T25-TR Insert Bit	T25H	1"	1
38350	T27-TR Insert Bit	T27H	1"	1
38352	T30-TR Insert Bit	T30H	1"	1
38354	T40-TR Insert Bit	T40H	1"	1
35380	T45-TR Insert Bit Shank Diameter 5/16"	T45H	1-1/4"	1



## Torx Align Screwdriver Bits

Torx Align

Item #	Description	Point	Length	Quantity
<b>Carded Items</b>				
<b>Insert Bits</b>				
TX10102G	T10 Torx Align	T10W	1"	5
TX15102G	T15 Torx Align	T15W	1"	5
TX20102G	T20 Torx Align	T20W	1"	5
TX25102G	T25 Torx Align	T25W	1"	5
TX27102G	T27 Torx Align	T27W	1"	5
TX30102G	T30 Torx Align	T30W	1"	5
<b>Bulk Items</b>				
<b>Insert Bits</b>				
38763	T6W Insert Bit	T6W	1"	1
38765	T7W Insert Bit	T7W	1"	1
38767	T8W Insert Bit	T8W	1"	1
38771	T10W Insert Bit	T10W	1"	1
38365	T15W Insert Bit	T15W	1"	1
38367	T20W Insert Bit	T20W	1"	1
38369	T25W Insert Bit	T25W	1"	1
38371	T27W Insert Bit	T27W	1"	1
38373	T30W Insert Bit	T30W	1"	1
<b>Power Bits</b>				
38732	T8W Insert Bit	T8W	1-15/16"	1
38734	T9W Insert Bit	T9W	1-15/16"	1
38375	T15W Insert Bit	T15W	1-15/16"	1
38377	T20W Insert Bit	T20W	1-15/16"	1
38379	T25W Insert Bit	T25W	1-15/16"	1
38381	T27W Insert Bit	T27W	1-15/16"	1
38383	T30W Insert Bit	T30W	1-15/16"	1



## Allen Screwdriver Bits

Hex

Item #	Description	Point	Length	Quantity
<b>Carded Items</b>				
<b>Insert Bits</b>				
AL564102	5/64" Allen Bit	5/64"	1"	2
AL332102	3/32" Allen Bit	3/32"	1"	2
AL764102	7/64" Allen Bit	7/64"	1"	2
AL18102	1/8" Allen Bit	1/8"	1"	2
AL964102	9/64" Allen Bit	9/64"	1"	2
AL532102	5/32" Allen Bit	5/32"	1"	2
AL316102	3/16" Allen Bit	3/16"	1"	2
AL732102	7/32" Allen Bit	7/32"	1"	2
AL14102	1/4" Allen Bit	1/4"	1"	2
AL516102	5/16" Allen Bit	5/16"	1"	2

<b>Bulk Items</b>				
<b>Insert Bits</b>				
27094	3/64" Socket Head Insert Bit	3/64"	1"	1
27095	1/16" Socket Head Insert Bit	1/16"	1"	1
27096	5/64" Socket Head Insert Bit	5/64"	1"	1
27097	3/32" Socket Head Insert Bit	3/32"	1"	1
37475	7/64" Socket Head Insert Bit	7/64"	1"	1
27098	1/8" Socket Head Insert Bit	1/8"	1"	1
37476	9/64" Socket Head Insert Bit	9/64"	1"	1
27099	5/32" Socket Head Insert Bit	5/32"	1"	1
27100	3/16" Socket Head Insert Bit	3/16"	1"	1
27101	7/32" Socket Head Insert Bit	7/32"	1"	1
27102	1/4" Socket Head Insert Bit	5/16"	1"	1
27103	5/16" Socket Head Insert Bit	5/16"	1"	1
27104	3/8" Socket Head Insert Bit	3/8"	1"	1
36538	2mm Socket Head Insert Bit	2MM	1"	1
36539	3mm Socket Head Insert Bit	3MM	1"	1
36540	4mm Socket Head Insert Bit	4MM	1"	1
36541	5mm Socket Head Insert Bit	5MM	1"	1
36542	6mm Socket Head Insert Bit	6MM	1"	1
36543	8mm Socket Head Insert Bit	8MM	1"	1
36544	3mm Socket Head Insert Bit Shank Diameter 5/16"	3MM	1-1/8"	1
36545	4mm Socket Head Insert Bit Shank Diameter 5/16"	4MM	1-1/8"	1
36546	5mm Socket Head Insert Bit Shank Diameter 5/16"	5MM	1-1/8"	1
36547	6mm Socket Head Insert Bit Shank Diameter 5/16"	6MM	1-1/8"	1
36548	8mm Socket Head Insert Bit Shank Diameter 5/16"	8MM	1-1/8"	1
<b>Power Bits</b>				
27420	1/16" Socket Head Power Bit	1/16"	1-15/16"	1
27421	5/64" Socket Head Power Bit	5/64"	1-15/16"	1
27422	3/32" Socket Head Power Bit	3/32"	1-15/16"	1
37563	7/64" Socket Head Power Bit	7/64"	1-15/16"	1
27423	1/8" Socket Head Power Bit	1/8"	1-15/16"	1
37565	9/64" Socket Head Power Bit	9/64"	1-15/16"	1
27424	5/32" Socket Head Power Bit	5/32"	1-15/16"	1
27425	3/16" Socket Head Power Bit	3/16"	1-15/16"	1



## Allen Security Screwdriver Bits

Allen Security

Item #	Description	Point	Length	Quantity
<b>Bulk Items</b>				
<b>Insert Bits</b>				
35693	1/8" Allen Security	1/8"	1"	1
35694	9/64" Allen Security	9/64"	1"	1
35695	5/32" Allen Security	5/32"	1"	1
35696	3/16" Allen Security	3/16"	1"	1
35697	7/32" Allen Security	7/32"	1"	1
35698	1/4" Allen Security	1/4"	1"	1
35699	5/16" Allen Security	5/16"	1"	1
35701	3/8" Allen Security	3/8"	1"	1



# Miscellaneous Screwdriver Bits



Pozidrive

## Pozidrive Screwdriver Bits

Item #	Description	Point	Length	Quantity
<b>Carded Items</b>				
<b>Insert Bits</b>				
PZD1102	Pozidrive #PZ1	PZ1	1"	5
PZD1102R	Pozidrive #PZ1 RIB	PZ1	1"	5
PZD2102	Pozidrive #PZ2	PZ2	1"	5
PZD2102R	Pozidrive #PZ2 RIB	PZ2	1"	5
PZD2R102	Pozidrive #PZ2R	PZ2R	1"	5
PZD3102	Pozidrive #PZ3	PZ3	1"	5
PZD3102R	Pozidrive #PZ3 RIB	PZ3	1"	5
<b>Power Bits</b>				
PZD1201	POZIDRIVE #1 RIB	PZ1	1-15/16"	5
PZD2201R	POZIDRIVE #2 RIB	PZ2	1-15/16"	5
PZD3201R	POZIDRIVE #3 RIB	PZ3	1-15/16"	5
<b>Bulk Items</b>				
<b>Insert Bits</b>				
27045	#1 POZIDRIV	PZ1	1"	1
27046	#2 POZIDRIV	PZ2	1"	1
27047	#3 POZIDRIV	PZ3	1"	1
<b>Power Bits</b>				
27380	#1 POZIDRIV	PZ1	1-15/16"	1
27381	#2 POZIDRIV	PZ2	1-15/16"	1
27382	#3 POZIDRIV	PZ3	1-15/16"	1
27386	#1 POZIDRIV	PZ1	3-1/2"	1
27387	#2 POZIDRIV	PZ2	3-1/2"	1
27388	#3 POZIDRIV	PZ3	3-1/2"	1
27389	#1 POZIDRIV	PZ1	6"	1
27390	#2 POZIDRIV	PZ2	6"	1
27391	#3 POZIDRIV	PZ3	6"	1



Torq

## Torq Screwdriver Bits

Item #	Description	Point	Length	Quantity
<b>Bulk Items</b>				
<b>Insert Bits</b>				
35395	#0 TORQ-SET	#0	1"	1
35396	#1 TORQ-SET	#1	1"	1
35397	#2 TORQ-SET	#2	1"	1
35398	#3 TORQ-SET	#3	1"	1
35399	#4 TORQ-SET	#4	1"	1
35394	#5 TORQ-SET	#5	1"	1
35401	#6 TORQ-SET	#6	1"	1
35402	#8 TORQ-SET	#8	1"	1
35403	#10 TORQ-SET	#10	1"	1
<b>Power Bits</b>				
35425	#0 TORQ-SET	#0	1-1/4"	1
35426	#1 TORQ-SET	#1	1-1/4"	1
35427	#2 TORQ-SET	#2	1-1/4"	1
35428	#3 TORQ-SET	#3	1-1/4"	1
35429	#4 TORQ-SET	#4	1-1/4"	1
35430	#5 TORQ-SET	#5	1-1/4"	1
35431	#6 TORQ-SET	#6	1-1/4"	1
35432	#8 TORQ-SET	#8	1-1/4"	1
35433	#10 TORQ-SET	#10	1-1/4"	1



Tri-wing

## Tri-wing Screwdriver Bits

Item #	Description	Point	Length	Quantity
<b>Bulk Items</b>				
<b>Insert Bits</b>				
35410	#1 Tri-wing Insert Bit	#1	1"	1
35411	#2 Tri-wing Insert Bit	#2	1"	1
35412	#3 Tri-wing Insert Bit	#3	1"	1
35413	#4 Tri-wing Insert Bit	#4	1"	1
35414	#5 Tri-wing Insert Bit	#5	1"	1



Spanner

## Spanner Screwdriver Bits

Item #	Description	Point	Length	Quantity
<b>Carded Items</b>				
<b>Insert Bits</b>				
SPA6102	#6 Spanner Gold	#6	1"	2
SPA802	#8 Spanner Gold	#8	1"	2
SPA10102	#10 Spanner Gold	#10	1"	2
<b>Bulk Items</b>				
<b>Insert Bits</b>				
35422	#6 Spanner Insert Bit	#6	1"	1
35423	#8 Spanner Insert Bit	#8	1"	1
35424	#10 Spanner Insert Bit	#10	1"	1



Clutch

## Clutch Screwdriver Bits

Item #	Description	Point	Length	Quantity
<b>Carded Items</b>				
<b>Insert Clutch Bits</b>				
CL3102	C3 Clutch	C3	1"	2
CL4102	C4 Clutch	C4	1"	2
<b>Bulk Items</b>				
<b>Insert Clutch G Bits</b>				
27082	5/32" Clutch Type G	5/32"	1"	1
27083	3/16" Clutch Type G	3/16"	1"	1
<b>Power Clutch G Bits</b>				
27437	5/32" Clutch Type G	5/32"	1-15/16"	1



Frearson

## Frearson Screwdriver Bits

Item #	Description	Point	Length	Quantity
<b>Carded Items</b>				
<b>Insert Bits</b>				
FR2102	F2 Frearson	F2	1"	2
<b>Bulk Items</b>				
<b>Insert Bits</b>				
27070	F1 Frearson	F1	1"	1



## Double-Ended Screwdriver Bits

Item #	Description	Point	Length	Quantity
<b>Carded Items</b>				
<b>Double-Ended Bits</b>				
DEBP16201R	P1-S6 RIB	P1-S6	1.88"	5
DEBP28201	P2-S8 RIB	P2-S8	1.88"	5
DEBP310201	P3-S10	P3-S10	1.88"	5
DEBP162501	P1-S6	P1-S6	2-1/2"	5
DEBP282501	P2-S8	P2-S8	2-1/2"	5
DEBP282501R	P2-S8 RIB	P2-S8	2-1/2"	5
DEBP3102501R	P3-S10 RIB	P3-S10	2-1/2"	5
DEBP1P22501	P1-P2	P1-P2	2-1/2"	5
DEBP222501	P2-P2	P2-P2	2-1/2"	5
DEBP2R22501R	P2-R2 RIB	P2-R2	2-1/2"	5
DEBR122501	R1-R2	R1-R2	2-1/2"	5
DEBR232501	R2-R3	R2-R3	2-1/2"	5
DEBT15202501	T15-T20	T15-T20	2-1/2"	5
DEBT2530101	T25-T30	T25-T30	1-1/2"	5
DEBP163501	P1-S6 RIB	P1-S6	3-1/2"	5
DEBP283501R	P2-S8 RIB	P2-S8	3-1/2"	5
<b>Bulk Items</b>				
<b>Double-Ended Bits</b>				
38666	Double Ended Bit P1-#6 Slotted	P1-#6	1-1/2"	1
38652	Double Ended Bit P2-#8 Slotted	P2-#8	1-1/2"	1
38653	Double Ended Bit P3-#10 Slotted	P3-#10	1-1/2"	1



## Screwdriver Bit Holder

Item #	Description	Point	Length	Quantity
<b>Carded Items</b>				
<b>Bit Holders</b>				
CC60482	CC60482 2" Magnetic Bit Tip Holder	—	2"	5
CC60486	CC60486 6" Magnetic Bit Tip Holder	—	6"	3
CC60491	CC60491 Compact Drive Guide	—	—	10
<b>Bulk Items</b>				
<b>Bit Holders</b>				
27690	Standard With C-Ring	1/4"	2-7/8"	1
27710	Standard With C-Ring	1/4"	4"	1
27750	Standard With C-Ring	1/4"	6"	1
27792	Standard With C-Ring	1/4"	12"	1
38215	One Piece Construction Non-Magnetic Bit Holder	1/4"	2-1/8"	1
40831	One Piece Construction Magnetic Bit Holder	1/4"	2-1/8"	1
40833	One Piece Construction Magnetic Bit Holder	1/4"	2-31/32"	1
40832	One Piece Construction Magnetic Bit Holder (Turned)	1/4"	2-31/32"	1
39972	One Piece Construction Magnetic Bit Holder (w/o C-Ring Retainer)	1/4"	2-7/8"	1
26790	Screw Cap Style Bit Holder	1/4"	2-7/8"	1
<b>Square Drive Bit Holders</b>				
31894	Square Drive Bit Holder	1/4"	1-1/8"	1
31895	Square Drive Bit Holder	3/8"	1-1/8"	1
<b>Specialty Bit Holders</b>				
31896	Square Drive Bit Holder	5/16"	1-3/8"	1
31897	Square Drive Bit Holder	5/16"	1 7/16"	1



## Screwdriver Nutsetter



Item #	Description	Point	Length	Quantity
<b>Carded Items</b>				
<b>Nutsetter</b>				
NS316101	Nutsetter	3/16"	1-5/16"	5
NS141401	Nutsetter	1/4"	1.412"	5
NS141401MAG	Nut Set MAG	1/4"	1-5/32"	5
NS14201	Nut Set MAG	1/4"	2"	5
NS1429601	Nut Set MAG	1/4"	2-9/16"	5
NS141401	No Round Nutsetter	1/4"	1-5/8"	5
ND31601	Nutsetter	3/8"	1.477"	5
NS381401	Nut Set N/MA	3/8"	1.86"	5
NS381401MAG	Nut Set MAG	3/8"	1.86"	5
NS3829601	Nut Set MAG	3/8"	2-9/16"	5
ND5161401	Nutsetter	5/16"	1-7/16"	5
NS516101MAG	Nut Set MAG	5/16"	1-1/4"	5
NS51629601	Nut Set MA	5/16"	2-9/16"	5
ND7161501	Nutsetter	7/16"	1-33/64"	5
NS716201MAG	Nut Set MAG	7/16"	2"	5
NS71629601	Nut Set MA	7/16"	2-9/16"	5
<b>Bulk Items</b>				
<b>Power Bits</b>				
31450	Mag. Nutsetter	1/4"	1-5/8"	1
31452	Mag. Nutsetter	5/16"	1-5/8"	1
36165	Mag. Nutsetter	3/8"	1-7/8"	1
36166	Nutsetter	3/8"	1-7/8"	1
37893	Mag. Nutsetter	7/16"	2"	1
37427	Nutsetter	1/4"	2"	1
37582	Mag. Nutsetter	1/4"	2-9/16"	1
37585	Nutsetter	1/4"	2-9/16"	1
37583	Mag. Nutsetter	5/16"	2-9/16"	1
37584	Mag. Nutsetter	3/8"	2-9/16"	1
38639	Mag. Nutsetter	7/16"	2-9/16"	1
<b>Nutsetter</b>				
38641	Mag. Nutsetter	1/4"	4"	1
38645	Mag. Nutsetter	1/4"	6"	1
38642	Mag. Nutsetter	5/16"	4"	1
38646	Mag. Nutsetter	5/16"	6"	1
38328	Nutsetter	8MM	1-5/8"	1
38329	Mag. Nutsetter	10MM	1-7/8"	1

## Screwdriver Bit Accessories

Item #	Description	Type	Point	Length	Quantity
<b>Accessories</b>					
49417	Compact Magnetic Screw Guide	Screw Guides	1/4"	3-1/16"	1
49415	Standard Magnetic Screw Guide	Screw Guides	1/4"	4-11/16"	1
39625	#5-6 Slotted Finder	Locator/ Driver	#5-6	3-1/2"	1
39626	#6-8 Slotted Finder	Locator/ Driver	#6-8	3-1/2"	1
39628	#10-12 Slotted Finder	Locator/ Driver	#10-12	3-1/2"	1
34610	1/4" Power Socket Adapter	Socket Adapter	1/4"	2"	1
37570	1/4" Power Socket Adapter	Socket Adapter	1/4"	3"	1
31594	1/4" Power Socket Adapter	Socket Adapter	1/4"	4"	1
31595	1/4" Power Socket Adapter	Socket Adapter	1/4"	6"	1
34611	3/8" Power Socket Adapter	Socket Adapter	3/8"	2"	1
38209	3/8" Power Socket Adapter	Socket Adapter	3/8"	3"	1

# Titanium Screwdriver Bits & Sets

## BOSCH Titanium Screwdriver Bits

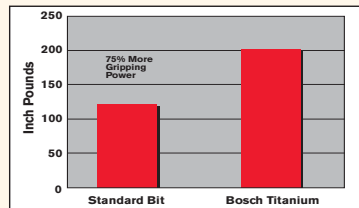

Titanium tough grip coating protects each gripping point from damage.



TM



**SQZR5163 - 5/16" Nutsetter 3 Pk.**



### Titanium Screwdriver Bits

Bosch titanium screwdriver bits feature patented Titanium Tough Grip coating. These innovative bits start with a rough surface that actually grips the entire inside dimension of the screw head with millions of gripping points. The bits are then coated with titanium to provide a hard surface that protects the gripping points from the rigors of repetitive use.

- Titanium Tough Grip coating significantly reduces slippage with 75% more gripping power and protects each gripping point from damage so bits don't need to be replaced as often as standard screwdriver bits
- Especially useful for burying long screws in treated lumber and metal
- The power groove on each bit fits all quick change systems and can be chucked directly into a drill

### Screwdriver Bit Sets

Item #	Description	Type	Point	Quantity
<b>Bit Sets &amp; Bit Pinch Packs</b>				
<b>Sets</b>				
T2643	Bosch 3 Piece	Set	Slotted	1
T4021	Bosch 21 Piece	Set	Mixed	1
T4038	Bosch 38 Piece	Set	Mixed	1
T4042	Bosch 42 Piece	Set	Mixed	5
SBID9	Bosch 9 Piece	Set	Mixed	6
<b>Pinch Packs</b>				
SQZRP2125	P2, 1", 25 PK	Phillips	P2	10
SQZRP2110	P2, 1", 10 PK	Phillips	P2	10
SQZRP2R125	P2D, 1", 25 PK	Phillips	P2D	10
SQZRS�6110	SL6, 1", 10 PK	Slotted	SL6	10
SQZRS�8110	SL8, 1", 10 PK	Slotted	SL8	10
SQZRR2125	R2, 1" 25 PK	Square	R2	1
SQZRR2110	SQ2, 1", 10 PK	Square	SQ2	10
SQZRT20110	T20, 1", 10 PK	Torx	T20	10
SQZRT25110	T25, 1", 10 PK	Torx	T25	10
SQZRT15110	T15, 1" 10 PK	Torx	T15	1
SQZRT27110	T27, 1" 10 PK	Torx	T27	1
SQZRT30110	T30, 1" 10 PK	Torx	T30	1
SQZRP225	P2, 2", 5 PK	Phillips	P2	10
SQZRS�625	SL6, 2", 5 PK	Slotted	SL6	10
SQZRS�825	SL8, 2", 5 PK	Slotted	SL8	10
SQZRR225	R2, 2", 5 PK	Square	R2	10
SQZR5163	Nutsetter, 5/16", 3 PK	Nutsetter	5/16"	10
SQZR383	Nutsetter, 3/8", 3 PK	Nutsetter	3/8"	10
SQZR143	Nutsetter, 1/4", 3PK	Nutsetter	1/4"	10
SQZR4533	Asst. Nutsetter 3 PC	Nutsetter	1/4", 5/16", 3/8"	10

Item #	Description	Type	Point	Quantity
<b>Phillips® Bit</b>				
TDP1102	P1 TiN Screw Bit	P1	1"	2 PK
TDDP2102	P2 TiN Deck Screw Bit	P2	1"	2 PK
TDP2102	P2 TiN Screw Bit	P2	1"	2 PK
TDP2110	P2 TiN	P2	1"	10 PK
TDP2D106	P2R Drywall TiN Screw Bit	P2R	1"	6 PK
TDP3102	P3 TiN Screw Bit	P3	1"	2 PK
TDP123103	P1, P2, P3 TiN Screw Bit	P1, P2, P3	1"	3 PK
TDP1201	P1 TiN Screw Bit	P1	2"	1 PK
TDP2201	P2 TiN Screw Bit	P2	2"	1 PK
TDP3201	P3 TiN	P3	2"	1 PK
TDP123203	P1, P2, P3 TiN	P1, P2, P3	2"	3 PK
TDP1351	P1 TiN	P1	3-1/2"	1 PK
TDDP2351	P2 TiN Deck Screw Bit	P2	3-1/2"	1 PK
TDP2351	P2 TiN	P2	3-1/2"	1 PK
TDP3351	P3 TiN	P3	3-1/2"	1 PK
<b>Square Bit</b>				
TDR2102	R2 TiN	R2	1"	2 PK
TDR2106	R2 TiN	R2	1"	6 PK
TDR2203	R2 TiN	R2	2"	3 PK
<b>Slotted Bit</b>				
TDSL68102	6-8 TiN	6-8	1"	2 PK
TDSL810102	8-10 TiN	8-10	1"	2 PK
TDSL1012102	10-12 TiN	10-12	1"	2 PK
TDSL68201	6-8 TiN	6-8	2"	1 PK
TDSL810201	8-10 TiN	8-10	2"	1 PK
TDSL1012201	10-12 TiN	10-12	2"	1 PK
TDSL681012203	6-8, 8-10, 10-12 TiN	6-8, 8-10, 10-12	2"	3 PK
TDSL68351	6-8 TiN	6-8	3-1/2"	1 PK
TDSL810351	8-10 TiN	10-12	3-1/2"	1 PK

## CLIC-CHANGE™ CHUCK

Up to 33% faster than competitive systems.

### Superior accuracy

Patent pending mechanism virtually eliminates looseness and wobble.

- Change bits without re-chucking.
- Fits all 3/8" and 1/2" drills.
- Accepts all 1/4" power hex shank accessories.



## The Heart of the System

True one-handed load and release!



To load - Push bit into chuck.



To release - Pull forward on the collar and remove.

**CLIC-CHANGE™**  
QUICK CHANGE BIT SYSTEM



CC2130



CC2480

## Cllic-Change™ Bit System

This quick change bit system features true one-handed load and release and is up to 33% faster than competitive systems. The superior accuracy of the patent-pending mechanism virtually eliminates looseness and wobble. To load, simply push bit into chuck. To release, pull forward on the collar and remove.

- Change bits without re-chucking. Switch from bit to bit quickly
- Fits all 3/8" and 1/2" drills

- Accepts all 1/4" power hex shank accessories including insert bits, nutsetters and sockets

Item #	Description	Quantity
CC2100	Chuck Adapter with Bonus Bits	5 Pc. Set
CC2110	Chuck & Drill Bit Set	8 Pc. Set
CC2120	Chuck, Drill Bit & Driver Set	10 Pc. Set
CC2130	Chuck, Drill Bit & Driver Set	27 Pc. Set
CC2201	1/16" Drill Bit	1
CC2203	3/32" Drill Bit	1
CC2205	1/8" Drill Bit	1
CC2207	5/32" Drill Bit	1
CC2209	3/16" Drill Bit	1
CC2211	7/32" Drill Bit	1
CC2221	1/8" Masonry Bit	1
CC2223	5/32" Masonry Bit	1
CC2225	3/16" Masonry Bit	1
CC2227	1/4" Masonry Bit	1
CC2244	#6 Adjustable Countersink	1
CC2246	#8 Adjustable Countersink	1
CC2248	#10 Adjustable Countersink	1
CC2253	#6 Self-Centering Bit	1
CC2255	#8 Self-Centering Bit	1

Item #	Description	Quantity
CC2257	#10 Self-Centering Bit	1
CC2260	Starter/Driver	1
CC2271	1/4" Magnetic Nutsetter	1
CC2273	5/16" Magnetic Nutsetter	1
CC2275	3/8" Magnetic Nutsetter	1
CC2400	Drill Bit Set	5 Pc. Set
CC2410	Masonry Bit Set	4 Pc. Set
CC2420	Spade Bit Set	4 Pc. Set
CC2430	Self-Centering Bit Set	3 Pc. Set
CC2460	Countersinking Set	7 Pc. Set
CC2470	Starter/Driver Set	12 Pc. Set
CC2480	Screwdriver Bit Set	12 Pc. Set
CC2490	Magnetic Nutsetter Set	3 Pc. Set
CCSQ2205	Square #2 Square Recess, 2"	5 PK
CCP2205	#2 Phillips, 2"	5 PK
CC60392	Allen Bit Set	7 Pc. Set
CC60467	2 Pc. Double Ended Bit Set 3 1/2"	2 PK
CC60464	3 Pc. Double Ended Bit Set 2"	2 PK
CC90396	Torx Bit Set	6 Pc. Set

## Screwdriver Bit Sets

Item #	Description	Type	Point	Quantity
<b>Miscellaneous Sets</b>				
P2110TCB	#2 Phillips, 1", Carded Tic Tac (10 PK)	P2	Phillips	1
P2D105	#2 Phillips, Drywall, 1" (5 PK)	P2R	Phillips	1
D60498	D60498 Dimpler	N/A	Dimpler	1
DWS60497	Drywall Screw Setter, #2 Phillips	1/4" Bit Holder	Magnetic Holder 2"	1